

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095
www.hammerton.com


Warranty

Please visit:

<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions Verona Two-Tier Ring Chandelier CHB0112-2T

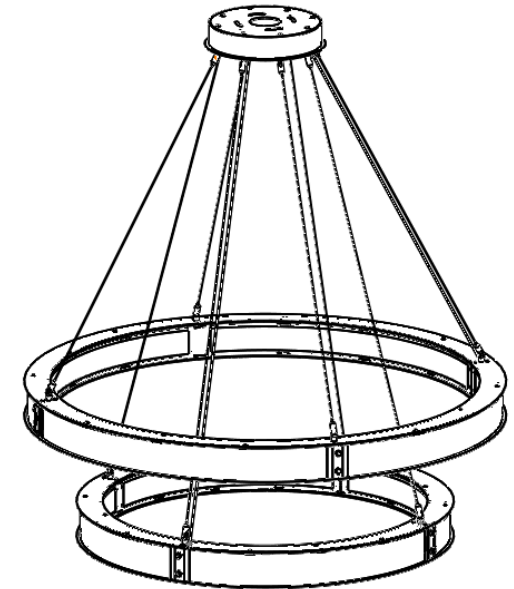

WARNING: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.


41-001-00348
Rev 3

Included Components

- A. Hardware Packet S/Z, with Instructions (Not Shown)
- B. Coax Cable QTY: 2 (installed on body)
- C. Cable QTY: 8
- D. Canopy with cover plates, LED driver, and controller installed
- E. Fixture Body QTY: 2 (36", 46")
- F. Controller QTY: 2
- G. Grippers QTY: 16 (installed on light body and canopy)

Required Tools

- 1. Flat Head and Phillips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)
- 3. Heat Gun (not provided)

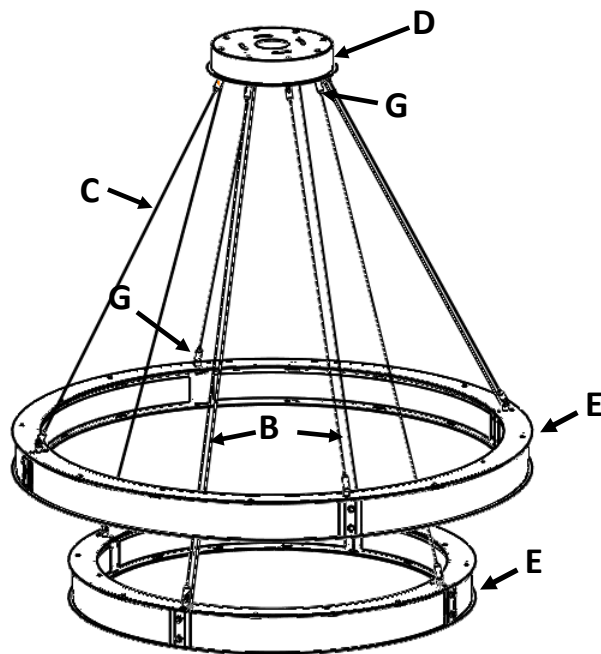


EXAMPLE FIXTURE
CHB0112-2T


Assembly Instructions

Step 1: Remove the cover plates by unscrewing the 6 flathead screws holding the face and cover plates to the main canopy (D). Mount the canopy by following Mount Packet S/Z instructions (A).

****Note that the desired mounting holes may be accessible without removing the face plate.**

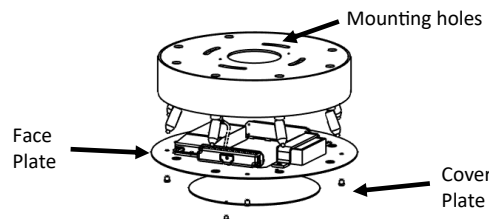


Step 2: Install the outer face plate ring back onto the main canopy (D). Make wire connections from drivers to power source, **Black to Black** and **White to White** and **Ground**.

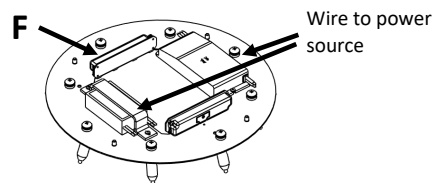


Step 3: Starting with the canopy side insert one end of the steel cable (C) into the **size specific** gripper (G). The cable should be visible from inside the ball joint, this ensures it is past the minimum insertion length. Repeat this for all 8 cables.

L = Large
S = Small



Step 4: Line up the 46" light body below the canopy orienting the coax hole on the light body (E) with the coax hole in the canopy (next to a gripper). Insert the cables in the corresponding grippers on the light body (E). Adjust to desired height and cut back remaining cable tail until concealed.

Cable side exits gripper when gripper is at a 90° orientation

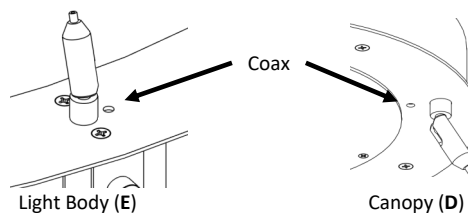


Step 5: Take the coax cable (B) and run up into wire way hole in canopy just behind the cable gripper mount (as shown in step 4). Use the cable clips (included in hardware packet) to attach the coax to the cable. Trim to length allowing for connection in the canopy. Make wire connections from the fixture to the LED controller (F). Prepare the end of the coax cable per instructions on next page and connect it to the **size specific** controller/driver combo. The connector will be labelled "S" or "L".

(See Wiring Diagram & Coax Cable Instructions).

Inner wire **to** Red
Outer wire **to** Black

WARNING: DO NOT CONNECT FIXTURE DIRECTLY TO POWER


Step 6: Test chandelier for illumination. Each chandelier is on a circuit with a LED color tunable controller built in. This can be accessed from the canopy with a push button.



****The light output can be set to the following options: 2700 3000 3500 4000k. The button switches through these options in order.**


****Repeat steps 4-6 for the remaining light body**

Step 8: Now reinstall cover plate back onto body. Leave the screws loose until you have both screws in the cover plate.



Coax Cable Instructions

1. Use sample section of coax cable provided as an example
2. Strip the clear outer insulator off the coaxial cable using the 14 ga position on the wire strippers
3. Use the heat shrink tubing to isolate the outer braided cable from the inner conductor
4. Use a second piece of heat shrink to secure the split between the inner and outer conductor

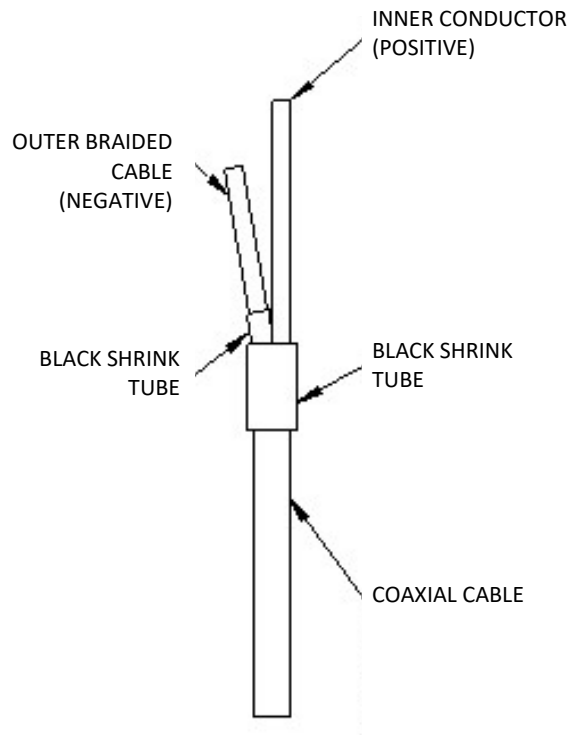

Driver Configuration

Each ring must be connected to the properly sized driver/controller combo. The picture below is a visual representation of the two sized drivers.


****The coax will connect to the controller directly NOT the driver**

For all coax wiring connections:

Inner wire **to** Red
Outer wire **to** Black

S = Small Ring (60 w driver)

L = Large Ring (75 w driver)

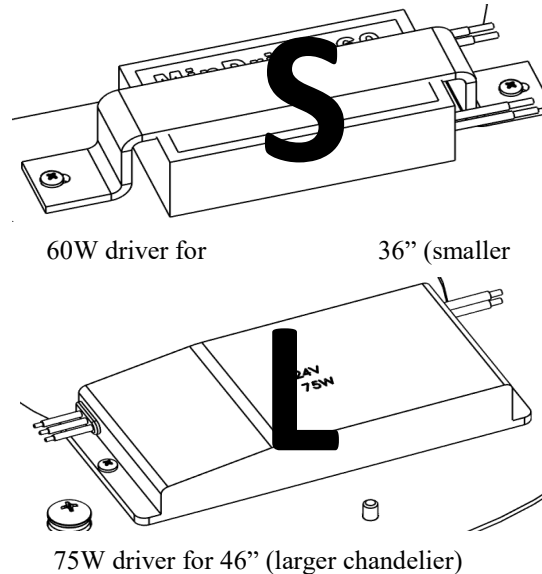

Wiring Diagram

