


Included Components

- A. Hardware Packet Z, with Instructions (Not Shown)
- B. Medium Gem Glass QTY 22
- C. Large Gem Glass QTY 22
- D. Cable Grippers QTY 24
- E. Aircraft cable with Coaxial cable QTY 12 (installed on body)
- F. Canopy with cover plates and LED drivers Installed
- G. Top Body with larger diameter (72")
- H. Bottom Body with smaller diameter (60")
- I. Face Plate

Required Tools

- 1. Flat Head and Phillips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)
- 3. Heat Gun

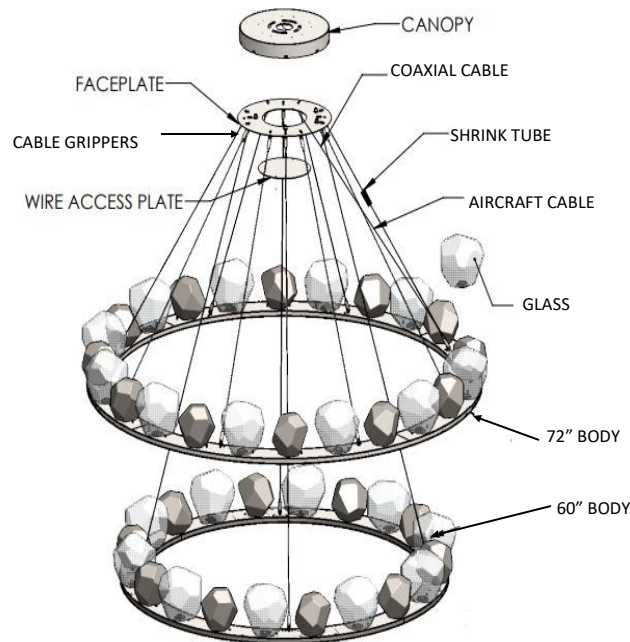

EXAMPLE FIXTURE
CHB0039-2D

Assembly Instructions

Step 1: First remove wire access plate. Second, remove faceplate with cord grippers attached.

Step 2: Mount Canopy to ceiling using included hardware Packet Z

Step 3: Connect drivers to source power. Ensure that wires are wired to the Driver, **Black to Black** and **White to White**.

WARNING: DO NOT CONNECT FIXTURE DIRECTLY TO SOURCE POWER OR THE LED WILL BE DAMAGED.


Step 4: Reinstall canopy faceplate with the cable grippers

Step 5: Hang all 12 aircraft cables from the cord grippers on the faceplate

Step 6: Slip 1 1/2 inch to 2 inch sections of heat shrink to cable grip with corresponding wire holes. You will need to place a section of heat shrink for every two feet of cable that will be used.

Step 7: Hang the 72" fixture body using the aircraft cable on the outer 8 cable grippers, adjusting the fixture to the desired height. Align the body so that the wireway holes in the 72" body line up to wireway holes in the canopy.

Step 8: Repeat the same process for the 60" body using the inner four cable grippers

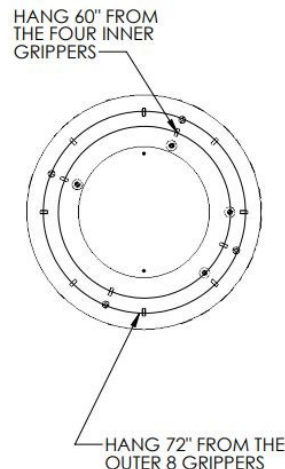

Step 9: Use clear heat shrink tube to combine the coaxial wire to the aircraft cable before making electrical connections

Step 10: Make electrical connections between the fixture and the drivers

- 1. Adjust height of fixture using the aircraft cable
 - 2. Before stripping the cable, push the coax cable wire provided through the cable gripper. Shown in Diagram 2
 - 3. Strip Cable as shown in Diagram 1
- Use the sample section of coax cable wire provided to use as an example for creating the wire connection in the canopy. When stripping the clear outer insulator of the coax cable wire use the 14-GA position of the wire strippers. Use the black shrink tube provided to create the end condition shown in Diagram 1.

To Make Electrical connections between drivers and fixture Red wire is positive, black wire is negative on the driver,.

- 1. Connect the wires labeled EBR020U-0500-42 to the Respective drivers there should be 1
- 2. Connect the wires labeled EBR020U-0500-32 to the Respective drivers there should be 1
- 3. Connect the wires labeled EBR010U-0250-42 to the Respective drivers there should be 2

Step 10: Reinstall wire access plate

Step 11: Install glass by inserting glass collar into corresponding holes on ring body and twist **90 degrees** to secure the glass in place. **Over rotating will not secure the glass.**

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095
info@hammerton.com
www.hammerton.com

ONE YEAR LIMITED WARRANTY

Hammerton, Inc. (Hammerton) warrants the original owner that this product will be free of defects in material or workmanship for the period of one year from the date of original purchase from Hammerton, if (i) the allegedly defective product has not been abused, misused or improperly maintained and or repaired during the warranty period, (ii) the defect is not caused by water damage/flooding, fire, explosion, earthquakes or similar phenomenon, and (iii) the defect is not caused by improper installation (unless installed by Hammerton).


In order to obtain warranty service, the user must first complete a warranty claims form. Hammerton will determine if the product will be inspected on site or returned to Hammerton. If after the inspection Hammerton finds that the product is defective as claimed, Hammerton will, at its option, repair or replace the product free of charge, or Hammerton may also agree to outsource necessary repair work locally using local contracted labor. Prior to any outsourcing of repair work regarding this fixture, a Work Authorization Form must be signed by both the client and Hammerton Representative. Failure to do so may result in a denial of reimbursement. Hammerton warrants any replaced or repaired products for ninety days after shipment or through the end of the original warranty period, whichever is longer. All products or parts that are replaced become the property of Hammerton.

No representative or employee of Hammerton is authorized to make any modification or addition to this limited warranty.

TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING WARRANTY AND REMEDIES ARE EXCLUSIVE, AND HAMMERTON EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TO THE FULL EXTENT ALLOWED BY LAW, HAMMERTON EXCLUDES AND DISCLAIMS LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE FOR ANY CONSEQUENTIAL, INDIRECT INCIDENTAL OR SPECIAL DAMAGES OF ANY NATURE ARISING OUT OF THE SALE INSTALLATION, MAINTENANCE, USE OR FAILURE OF THIS PRODUCT, EVEN IF HAMMERTON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES IN ADVANCE, AND HAMMERTON LIMITS ITS LIABILITY TO REPLACEMENT, REPAIR OR REFUND OF THE PURCHASE PRICE PAID, AT HAMMERTON'S OPTION.) SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION ON IMPLIED WARRANTY AND INCIDENTAL OR CONSEQUENTIAL DAMAGES MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS YOU MAY HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE

Assembly Instructions

CHB0039-2C, CHB0039-2D

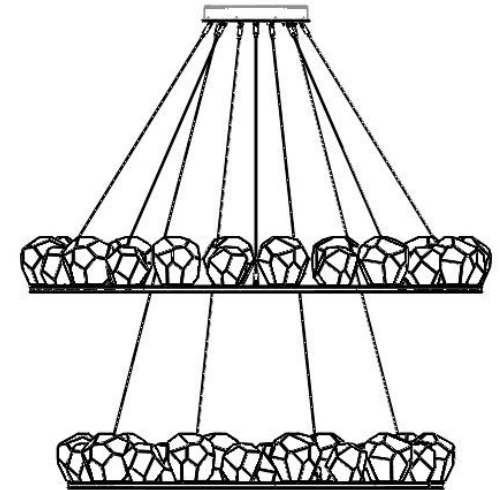

EXAMPLE FIXTURE
CHB0039-2D

WARNING: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.

Diagram 1

WIRING INSTRUCTIONS

1. USE THE SAMPLE SECTION OF COAX CABLE PROVIDED TO USE AS AN EXAMPLE FOR CREATING WIRE CONNECTION IN THE CANOPY
2. WHEN STRIPPING THE CLEAR OUTER INSULATOR OF THE COAXIAL CABLE USE THE 14 GA POSITION OF THE STRIPPERS
3. USE THE BLACK SHRINK TUBE PROVIDED TO CREATE THE END CONDITION SHOWN IN THE DIAGRAM BELOW
4. EACH DRIVER CONNECTS TO A COAXIAL CABLE FROM FIXTURE

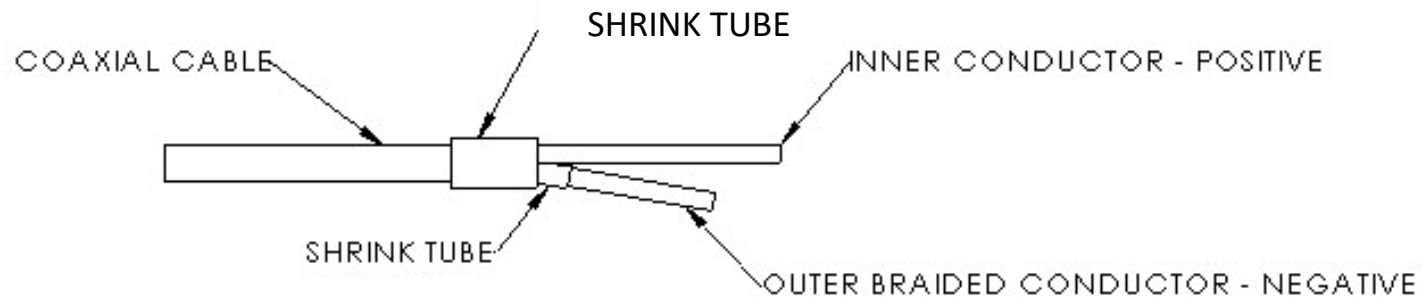


DIAGRAM OF END CONDITION TO CREATE FOR WIRING DRIVERS INSIDE OF THE CANOPY.

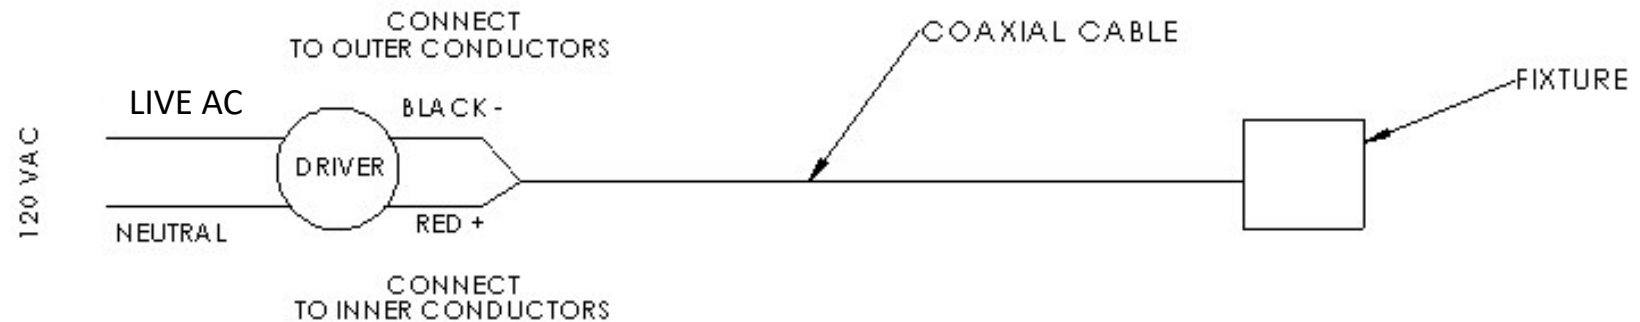


Diagram 2

