


Included Components



- A. Hardware Packet T with Instructions
- B. Toggle Bolts and Washers (QTY: 7)
- C. Cylinder Knobs (QTY: 12)
- D. Canopy and Light Body
- E. Light Housings (2S,2M,2L)
- F. Glass Disc Assemblies (2S,2M,2L)

Required Tools

- 1. Philips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)

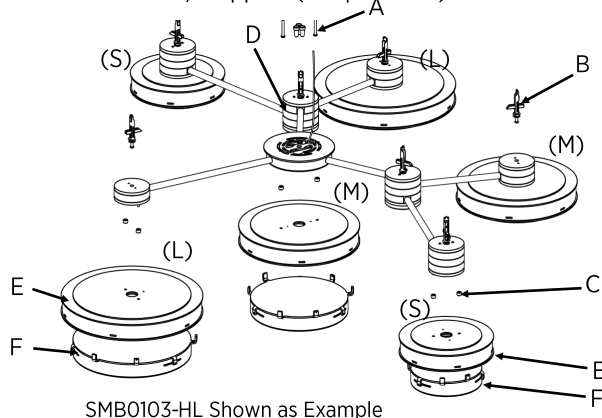

Layout: Notice locations of Light Housing Sizes.




Assembly Instructions


Step 1: TURN OFF POWER TO JUNCTION BOX TO BE USED FOR INSTALLATION.

WARNING: Failure to use the LED driver to power your fixture will permanently damage your product making it unusable

Step 2: Remove Canopy Universal from light fixture by removing the 2 cylinder knobs in the center hub and pulling the canopy and light body and the Canopy Universal apart.

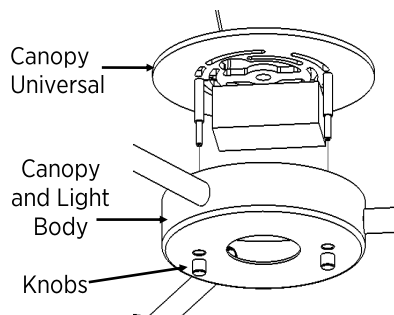


Step 3: Follow mounting packet T instructions to attach canopy universal to ceiling. **Note: Standoff orientation affects fixture orientation.**

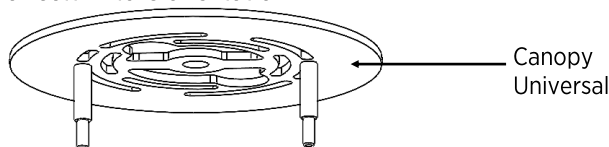

Step 4: Refer to mounting template instructions 41-001-00307/41-001-00308 to mark mounting locations onto the wall/ceiling.

Step 5: Remove the 3-way hub covers by unscrewing them counterclockwise.

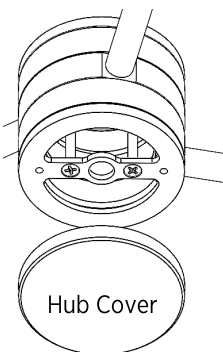


Step 6: Follow the first step of the toggle bolt instructions on the following sheet to attach toggle bolts to dry-wall at each of the 3 locations you marked using the mounting template.

WARNING


The PURPLE and RED leads from the driver are for DC current only. If these leads or the Fixture wires are connected to AC power the fixture will be damaged.

Step 7: Make wire connections from driver to source power as per mounting packet T instructions. Reattach canopy to universal using cylinder knobs (this step may require 2 people). Ensure that the short leads attached to the driver run out the center of the canopy for easy access later.

Step 8: Follow the rest of the toggle bolt instructions on next page to attach the 3 hub locations marked using the mounting template to the wall using the toggle bolts. Be sure to use the included washers (shown below)


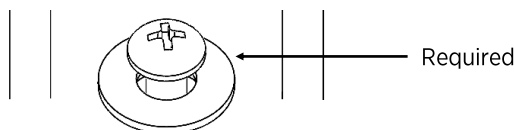


Step 9: Orient the 4 arms that are still free-swinging as desired. Ensure that there is a large enough angle between 2 hubs so that the light housings will not collide when installed. Once orientation is determined, mark drywall at each of the 4 hub locations (shown to the right).

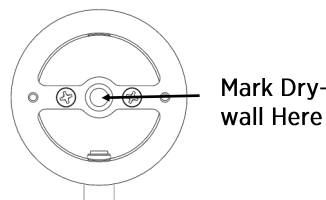



Step 10: Once locations have been marked, move arms temporarily out of the way to install toggle bolts at each of the 4 locations. Once toggles have been installed, swing the arms back into position and secure with toggle screws and washers.

Step 12: Grip the edges of the snap-on bezels and gently pry down until the snap-on bezel pops loose. (As pictured right) Set bezel to the side. Repeat for all 3 sizes.

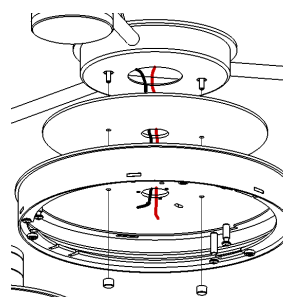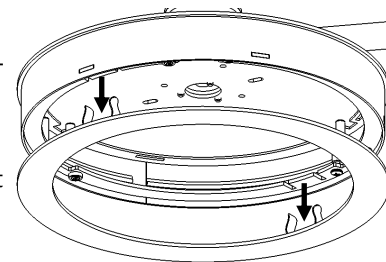

Step 13: Locate the Medium Light Housing that lines up with the studs in the central canopy (wider hole pattern). Run the black and red wires through the center hole of that light housing, then secure in place with 2 cylinder knobs from the hardware pack.


Step 14: Run the red and black wires out of the hubs and through the center holes in the Light Housings. Align the studs from the hubs with the holes on the Light Housings. Secure with the cylinder knobs from the hardware pack.

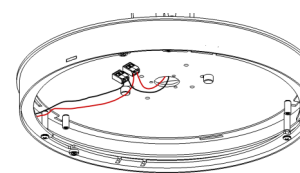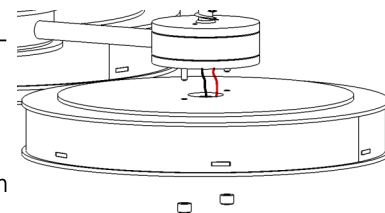

Step 15: Connect the red to red wires and the black to black wires with the attached Wagos.

Step 16: Using 3X 5/16" 8-32 screws from hardware pack screw Glass Disc Assemblies to appropriate Light Housings.

Step 17: Reinstall the snap-on bezels to the Light Housings they were removed from.

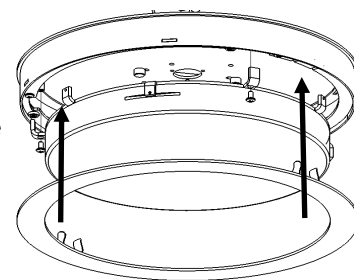

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095
info@hammerton.com
www.hammerton.com

Warranty



Please visit:
<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions

6 Piece Surface Mount

SMB0103-HL/H6

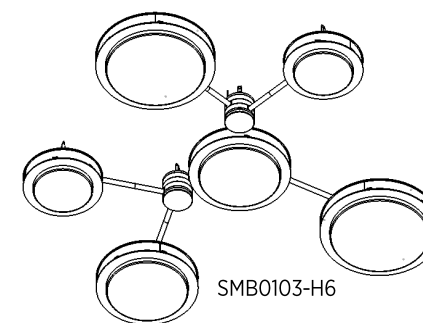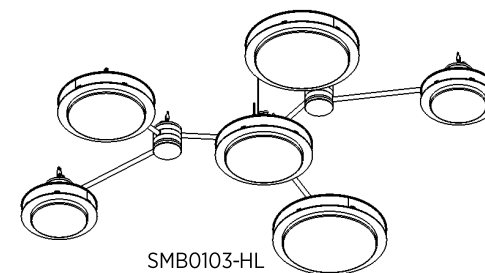

WARNING: Failure to use the LED driver to power your fixture will permanently damage your product making it unusable.

WARNING: FAILURE TO INSTALL THIS
FIXTURE PROPERLY MAY RESULT IN
SERIOUS PERSONAL INJURY OR DEATH
AND PROPERTY DAMAGE.


It is recommended that this product be installed
by a licensed electrician.

41-001-00341
Rev 2


E-Z Toggle™ Instructions



Turn E-Z Toggle into drywall until seated flush. Arrows on head indicate direction toggle clamp will open. End with arrows up and down.



Place fixture over E-Z Toggle. Push screw into E-Z Toggle to engage clamp

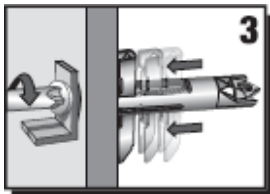

Turn screw until it stops. Toggle clamp tightens against drywall as screw is turned.