


1. REMOVE CANOPY COVER PLATE
2. INSERT AIRCRAFT CABLE CYLINDER ENDS INTO CANOPY FROM TOP
3. MOUNT CANOPY TO CEILING WITH HARDWARE PACK
4. MOUNT LED DRIVER INTO CANOPY WITH SCREWS
5. MAKE ELECTRICAL CONNECTION TO LED DRIVER
6. INSTALL LIGHT RING USING AIRCRAFT CABLE AND CABLE GRIPPERS (SEE LIGHT BODY INSTRUCTIONS)
7. MAKE ELECTRICAL CONNECTIONS
8. REINSTALL CANOPY COVER PLATE



1. INSTALL CANOPY (SEE CANOPY INSTRUCTIONS)
2. REMOVE LIGHT BODY COVER PLATES
3. ATTACH LIGHT BODY TO CANOPY WITH AIRCRAFT CABLE AND CABLE GRIPPERS ON LIGHT BODY, ADJUST TO PREFERRED HEIGHT
4. INSTALL GLASS TO LIGHT BODY, ALTERNATING SIDES TO KEEP LIGHT BODY BALANCED
5. REINSTALL LIGHT BODY COVER PLATES
6. MAKE ELECTRICAL CONNECTIONS IN CANOPY

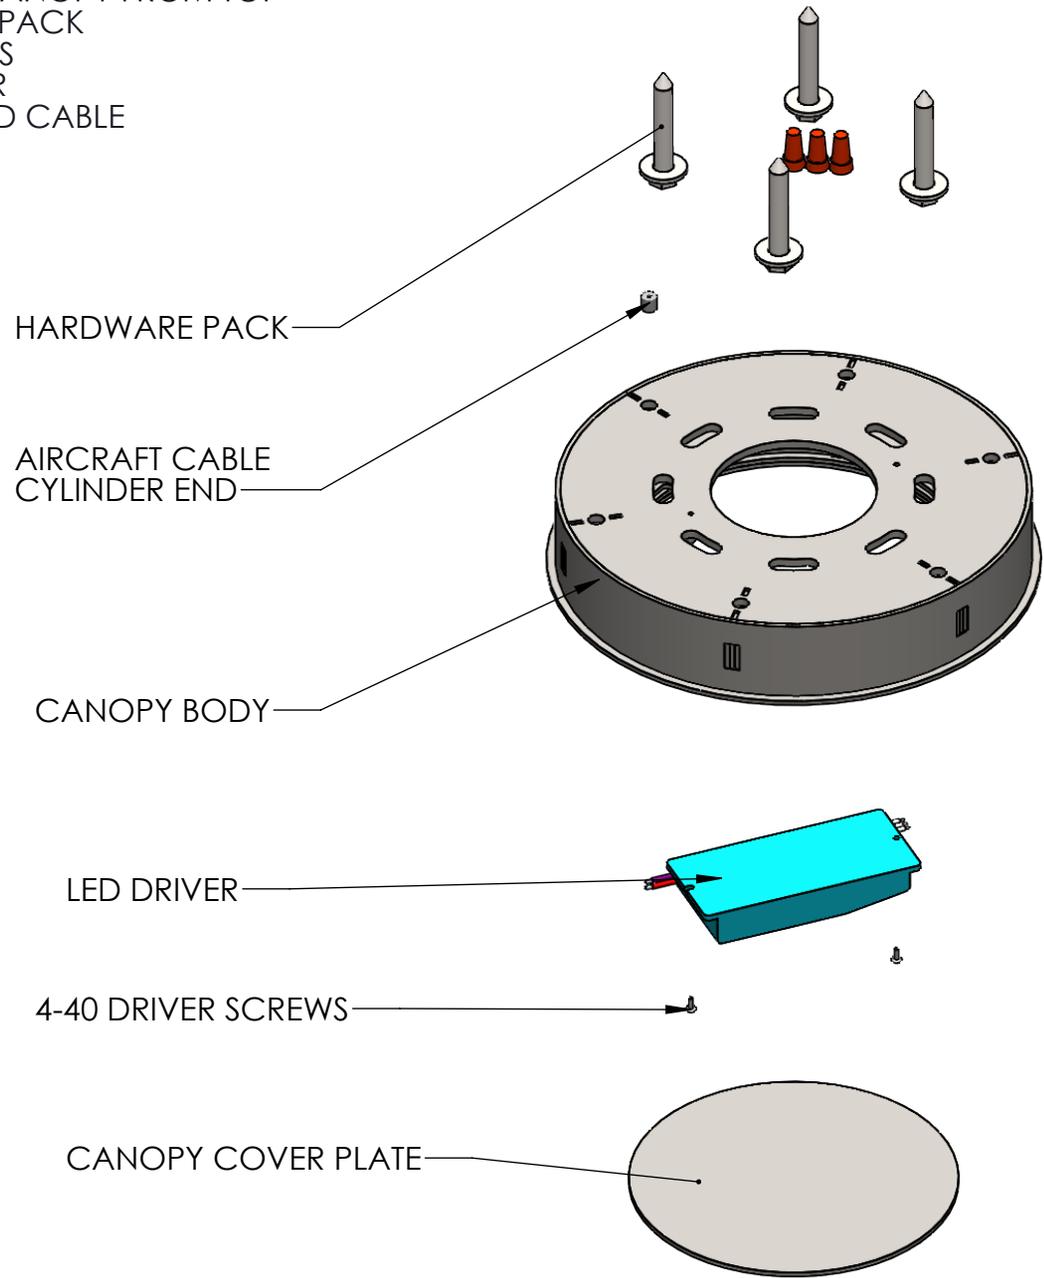