


## Included Components

- A. Hardware Packet Y with instructions (Not Shown)
- B. Glass Gems (QTY:6)
- C. Canopy
- D. Driver
- E. Accent Rods

## Required Tools

- 1. Philips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)
- 3. Measuring tape (not provided)

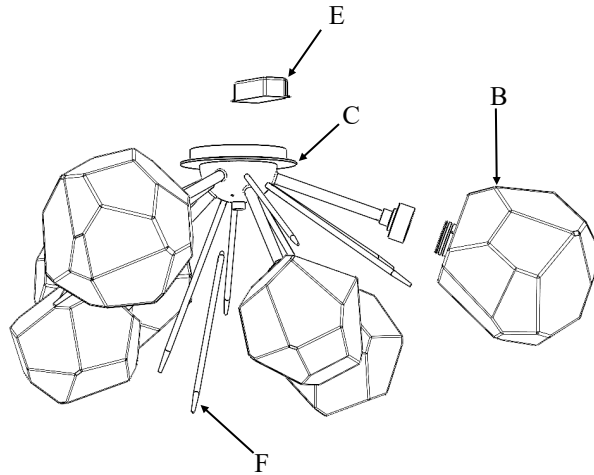

CLB0039-02 Example

## Assembly Instructions


**Step 1:** Install LED driver in J-Box. Dry fit driver and universal mounting plate before securing driver with double sided tape. **ENSURE POWER IS OFF. DO NOT POWER ON UNTIL LED IS CONNECTED.**

**Step 2:** Make wire connections from driver to source power, **Black to Black and White to White.**


**Note:** Purple and Pink wires are only used for 0-10V dimming. Cap these wires separately if 0-10V dimming is not being used.

**Step 3:** Attach universal to the J-box using the provided 1.5" long #8-32 pan head screws.


**Step 4:** Route the LED Driver(E) wires through the Canopy (C) and out the Hickey. Mount the Canopy to the J-Box following the provided **Mounting Instructions.**

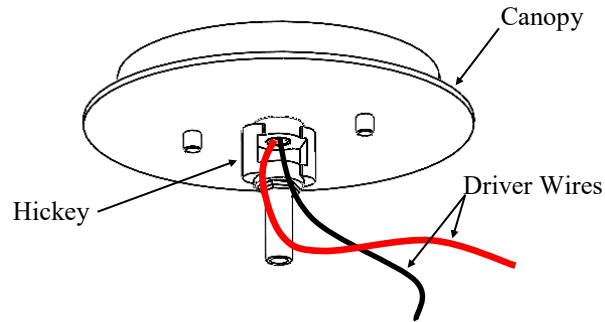

**Step 5:** Make wire connections between LED Driver(E) and Fixture **RED to RED and BLACK to BLACK.** Slide Fixture over IP extending from Canopy(C) and secure with Cylinder Knob.

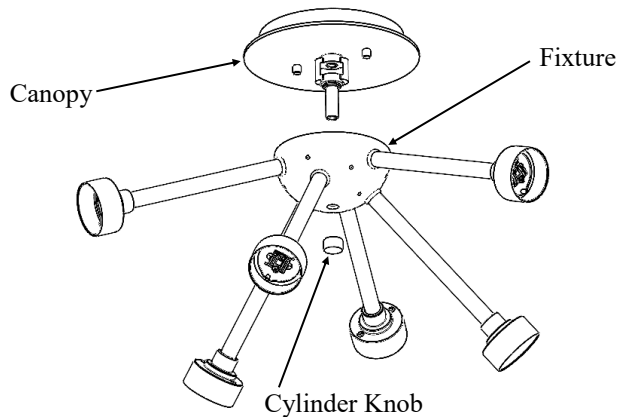


**Step 6:** Attach accent rods to light by threading them into the 8-32 all thread. There is no particular placement order for the different sized accent rods.



**Step 7:** Attach glass to LED housings.

**NOTE:** Install glass one at a time, ensuring fixture remains balanced. **TWO INDIVIDUALS ARE HIGHLY RECOMMENDED FOR GLASS INSTALLATION.**

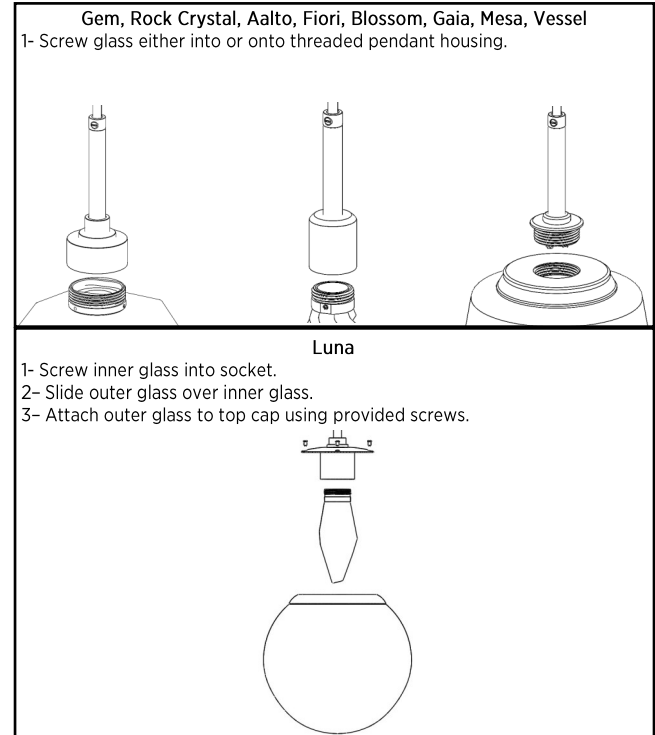

For all Glass Retention

Tighten till snug  
**DO NOT** overtighten

## About Hammerton Studio

---

### HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

### EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

### THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

### A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.  
217 Wright Brothers Drive  
Salt Lake City, UT 84116

801-973-8095 EXT: 4  
[www.hammerton.com](http://www.hammerton.com)

## Warranty


---

Please visit <https://studio.hammerton.com/lifetime-limited-warranty/> to view the Hammerton Studio Warranty Policy.

# HAMMERTONSTUDIO™

## Assembly Instructions LED, STARBURST

CLB00XX-02

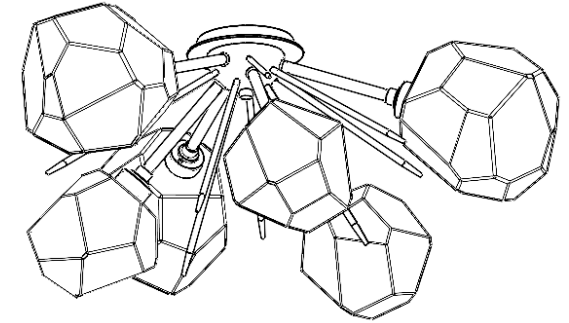

CLB0039-02

**WARNING: FAILURE TO INSTALL THIS  
FIXTURE PROPERLY MAY RESULT IN  
SERIOUS PERSONAL INJURY OR DEATH  
AND PROPERTY DAMAGE.**

It is recommended that this product be installed  
by a licensed electrician.

41-001-00254  
Rev 1