


Included Components

- A. Hardware
 - i. Cylinder knobs, #8-32 female (24)
 - ii. Flat cap (1)
 - iii. Check ring (1)
 - iv. 1.5" long, .375" dia all thread (1)
 - v. Clear cushion washers (48)
 - vi. #8-32 Philips head screw (24)
- B. Curved textured glass panel (4)
- C. 1.25"x7" frosted trim (4)
- D. Frosted round diffuser (1)
- E. Chassis
 - i. C-Arm (12)
 - ii. Ring (1)
- F. Canopy with rods (1)
- G. Mounting packet Y (1) (not shown)

Required Tools

- 1. Phillips screw driver (not provided)

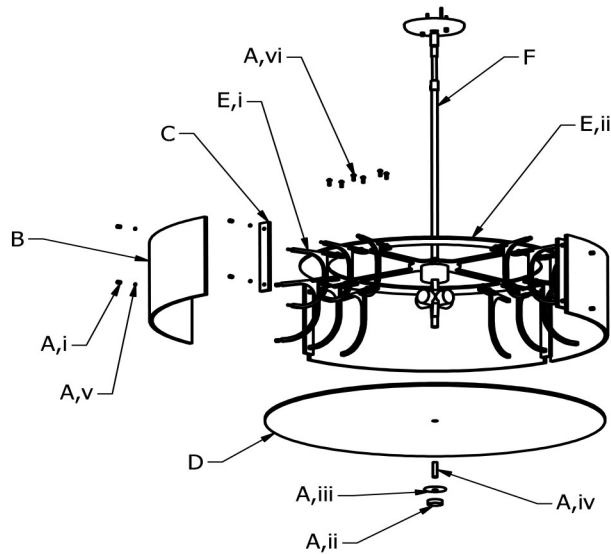


Assembly Instructions

Step 1: Using the provided Threaded Rod Assembly Instructions, assemble the rods to the desired Over All Height (OAH). Loctite must be used on the threaded rods before final install.


Step 2: Gently push wires through the rod assembly and attach one end of the rods to the light body.

Step 3: Mount the fixture to the ceiling following the provided **Mounting Instructions**. **DO NOT ATTACH THE GLASS BEFORE MOUNTING.**


Step 4: Place the one clear cushion washer (A,v) on each stud of each C-Arm (E,i). Be sure to push the cushion washer all the way down to the base of the stud.




Step 5: Loosely mount the C-Arms (E,i) to the chassis ring (E,ii) using the provided #8-32 Phillips head screws. **DO NOT TIGHTEN AT THIS POINT.**

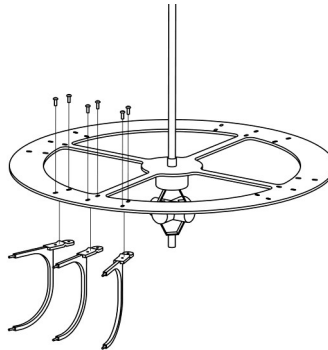

Step 6: Attach the four frosted trim (C) pieces to the center c-arm (E,i) of each cluster of three. Be sure to place the cushion washer (A,v) on the threaded stud of the c-arm between the 1"x7" frosted glass trim (C) and the cylinder knob (A,i) used to hold the glass in place. **DO NOT USE PLIERS OR WRENCH TO TIGHTEN.**

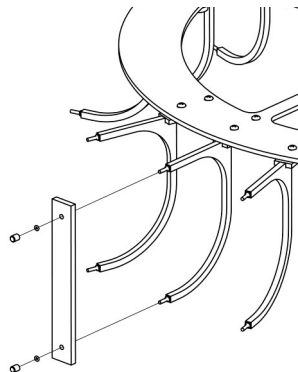

Step 7: Adjust the leveling of the c-arms with the frosted glass trim (C) attached by tightening and loosening the screws. Try to create an even gap between the bottom surface of the chassis ring (E,ii) and the top surface of the c-arm (E,i) adjustment tab on both sides of the pivot point.



Step 8: Remove protective film from the frosted round diffuser (D). Mount the acrylic diffuser to the chassis (E) using the 1.5" long, .75" dia all thread (A, iv), check ring (A, iii) and flat cap (A, ii). Connect the flat cap, check ring, and all thread first. Then attach the acrylic diffuser, threading the all thread into the female coupler connected to the chassis's electrical assembly. The acrylic diffuser should touch the bottom of the frosted trim pieces (C).

Step 9: THE C-ARMS WITHOUT GLASS ATTACHED TO THEM SHOULD BE LOOSELY ATTACHED TO THE CHASSIS RING. Loosely attach the four curved textured glass panels (B) using the cylinder knobs (A,i) tightened by hand. **BE SURE TO PLACE CUSHION WASHERS BETWEEN GLASS AND CYLINDER KNOBS.** For each panel, attach one end first to both the top and bottom studs of the c-arm, then the other. Loosely attach all curved glass panels before adjusting and tightening.

Step 10: Starting with one curved panel and working your way around the entire fixture, push the curved glass panel (B) inward until it touches the diffuser (D). Then begin adjusting the height of the glass panel using the screws attaching the c-arms (E,i) to the chassis ring (E,ii). The arms holding the frosted trim (C) can be adjusted as well. **DO NOT OVER TIGHTEN THE SCREWS LIGHT HAND PRESSURE SHOULD BE SUFFICIENT.**

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095 EXT: 4
www.hammerton.com

Warranty

ONE YEAR LIMITED WARRANTY

Hammerton, Inc. (Hammerton) warrants the original owner that this product will be free of defects in material or workmanship for the period of one year from the date of original purchase from Hammerton, if (i) the allegedly defective product has not been abused, misused or improperly maintained and or repaired during the warranty period, (ii) the defect is not caused by water damage/flooding, fire, explosion, earthquakes or similar phenomenon, and (iii) the defect is not caused by improper installation (unless installed by Hammerton).

In order to obtain warranty service, the user must first complete a warranty claims form. Hammerton will determine if the product will be inspected on site or returned to Hammerton. If after the inspection Hammerton finds that the product is defective as claimed, Hammerton will, at its option, repair or replace the product free of charge, or Hammerton may also agree to outsource necessary repair work locally using local contracted labor. Prior to any outsourcing of repair work regarding this fixture, a Work Authorization Form must be signed by both the client and Hammerton Representative. Failure to do so may result in a denial of reimbursement. Hammerton warrants any replaced or repaired products for ninety days after shipment or through the end of the original warranty period, whichever is longer. All products or parts that are replaced become the property of Hammerton.

No representative or employee of Hammerton is authorized to make any modification or addition to this limited warranty.


TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING WARRANTY AND REMEDIES ARE EXCLUSIVE, AND HAMMERTON EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TO THE FULL EXTENT ALLOWED BY LAW, HAMMERTON EXCLUDES AND DISCLAIMS LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE FOR ANY CONSEQUENTIAL, INDIRECT INCIDENTAL OR SPECIAL DAMAGES OF ANY NATURE ARISING OUT OF THE SALE INSTALLATION, MAINTENANCE, USE OR FAILURE OF THIS PRODUCT, EVEN IF HAMMERTON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES IN ADVANCE, AND HAMMERTON LIMITS ITS LIABILITY TO REPLACEMENT, REPAIR OR REFUND OF THE PURCHASE PRICE PAID, AT HAMMERTON'S OPTION.)

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION ON IMPLIED WARRANTY AND INCIDENTAL OR CONSEQUENTIAL DAMAGES MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS YOU MAY HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE

HAMMERTONSTUDIO™

Assembly Instructions

CHB0044-XX-XX-X,

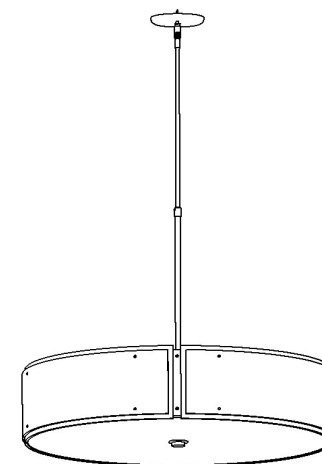

WARNING: FAILURE TO INSTALL THIS
FIXTURE PROPERLY MAY RESULT IN
SERIOUS PERSONAL INJURY OR DEATH
AND PROPERTY DAMAGE.

CAUTION: Be sure to turn off all power
running to the junction box that this

41-001-00056
Rev 3