

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095
www.hammerton.com


Warranty

Please visit:
<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions

CNB00XX-03, CNB00XX-05 (chain options)

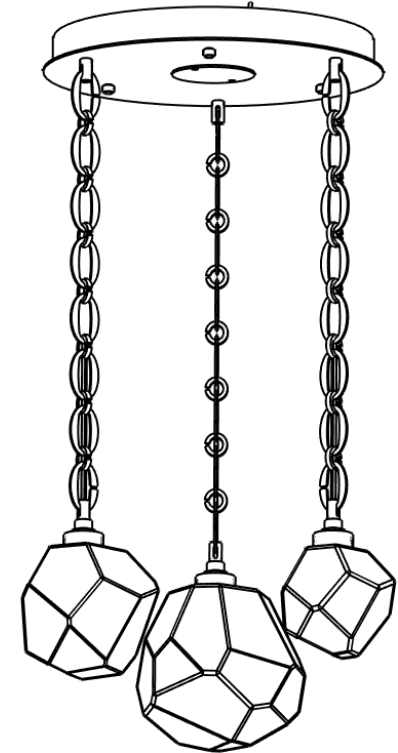

Example: CNB0039-03
Gem 3PC Chain Multi-Port

**WARNING: FAILURE TO INSTALL THIS
FIXTURE PROPERLY MAY RESULT IN
SERIOUS PERSONAL INJURY OR DEATH
AND PROPERTY DAMAGE.**

It is recommended that this product be installed
by a licensed electrician who is familiar with
proper LED installation and electrical loads.


41-001-00311
Rev 2

Included Components

- A. Hardware Packet S & Z
- B. Canopy
 - B1. Chain Grips
 - B2. Cylinder Knobs
 - B3. Access Plate
- C. Pendants
 - C1. Light Body
 - C2. Chain Grip
 - C3. Blown Glass
- D. Chain (unassembled)
 - D1. Ring Chain Links
 - D2. Flat Chain Link
 - D3. Open Flat Chain Links

Required Tools

1. Philips screw driver (not provided)
2. Wire cutters/strippers (not provided)
3. Measuring tape (not provided)

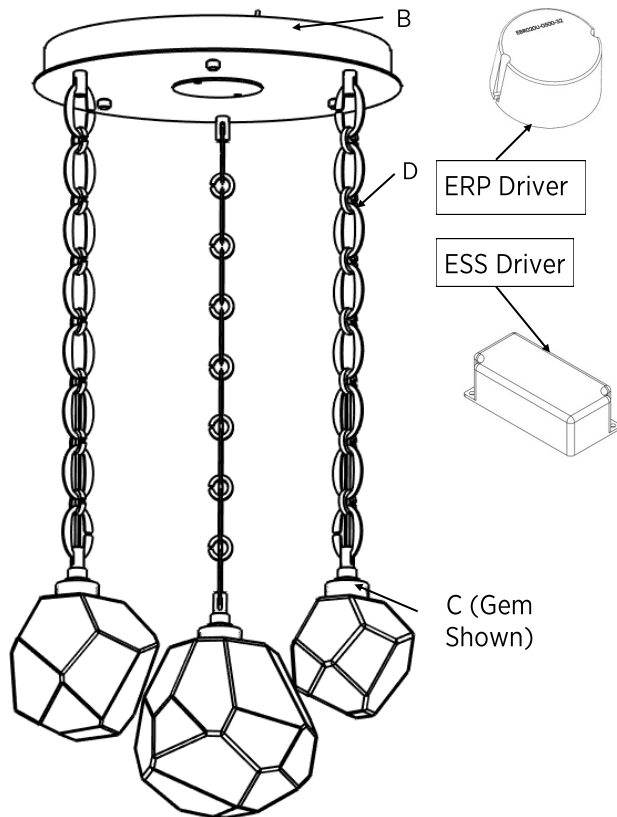

Assembly Instructions


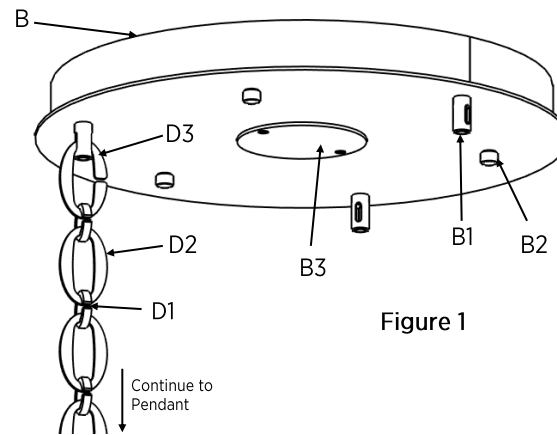


Figure 1

Step 1: TURN OFF POWER TO JUNCTION BOX TO BE USED FOR INSTALLATION.

Step 2: Unscrew cylinder knobs (B2) to detach canopy faceplate from canopy backplate. (**Note:** Canopy faceplate and backplate are tied together via cables to aid in installation)

Step 3: Mount canopy backplate by following provided Hardware Packet S & Z Instructions. Once mounted, leave faceplate hanging from cables as shown below.



Step 4: Gently bend open the provided Open Chain Links (D3) and slide inside each of the provided Chain Grips (B1) attached to the canopy. Bend the open links straight.

Step 5: Starting from the Open Chain Link (D3) attached to canopy (B) Assemble the chain by interlocking alternating Flat Chain Links (D2) and Ring Chain Links (D1) (See Figure 1 for example) until desired overall height for each of the pendants (C) is achieved.

Step 6: Attach Pendant Light Body (C1) to the pendant chain using the pre-attached chain link (D3). (see Figure 2)

Step 7: Thread the pendant wires through the chain, weaving it back and forth through the Flat Chain Link openings up the pendant chain.

Step 8: Thread the pendant wires through the hole in the top of the chain grip (B1). If it is difficult to fit the wires past the Open Chain Link, remove it and replace it after threading the wires through the Chain Grip.

NOTE: Pendant wires are marked red and black on ends of wires, do not cut wires until you are ready to install them to terminal block. (in the event that the identifying colors are cut off the wire, the wire that is subtly rough on one edge corresponds to black and the smooth wire corresponds to red)

Step 9: One at a time, peel back the red wire of a pendant (pendant wire splits into 2) clip and strip to length, and install it to an LED terminal that is available (shown below). Then clip and strip the black wire and install it to that same LED terminal and move on to the next pendant. Any pendant can go to any available terminal.

Note: for the 5 Pendant Configuration, there will be 4 Pendants attached to the terminal block, and one pendant attached to the lone ESS Driver (shown on the left). Connect the Red/Smooth wire to the Red wire of the driver and the Black/Rough wire to the Black

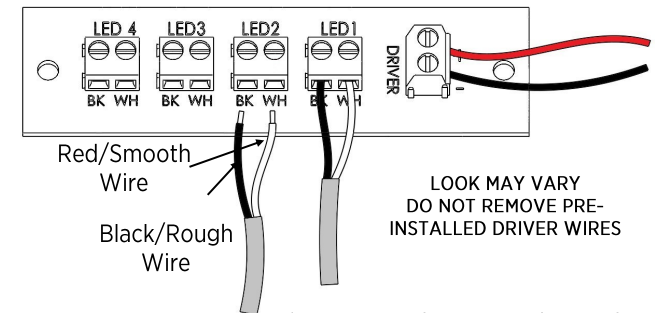


Figure 2

Step 10: Replace canopy faceplate and secure with cylinder knobs.






Step 11: Remove access plate (B3) and connect the drivers to source power using provided wire nuts **Black to Live and White to Neutral**. Attach ground using provided wire nuts. Replace access plate

WARNING

DO NOT DIRECTLY CONNECT LEDs TO AC POWER. LEDs will be damaged if exposed to high voltages. The LED's must be wired in series to work properly.

Step 12: Install glass by following the fixture specific glass instructions shown below and on the right.

Prior to installing glass ensure faceplate is in place according to Step 10

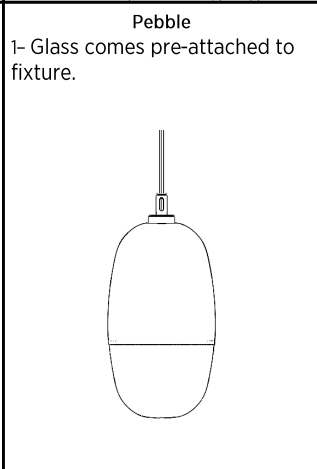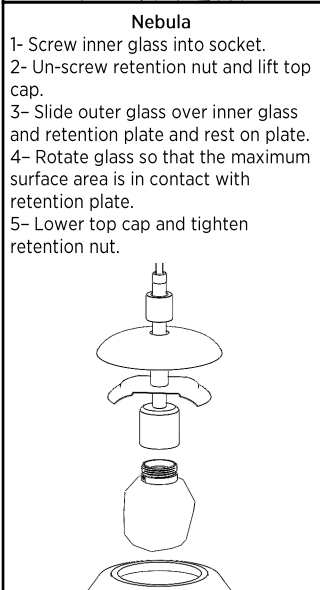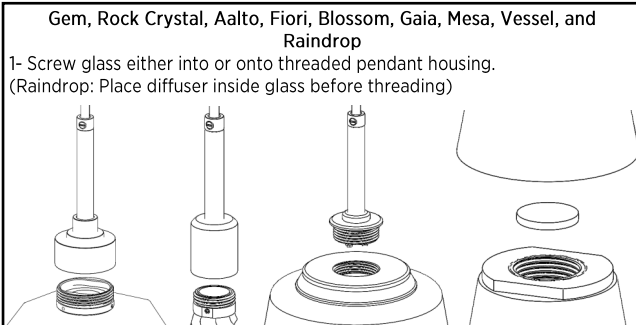

For all Glass Retention

**Tighten till snug
DO NOT overtighten**