

## About Hammerton Studio

---

### HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

### EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

### THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

### A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.  
217 Wright Brothers Drive  
Salt Lake City, UT 84116

801-973-8095  
[www.hammerton.com](http://www.hammerton.com)

## Warranty


---

Please visit:  
<https://studio.hammerton.com/lifetime-limited-warranty/>  
to view the Hammerton Studio Warranty Policy

# HAMMERTONSTUDIO™

## Assembly Instructions

CNB00XX-03, CNB00XX-05 (chain options)

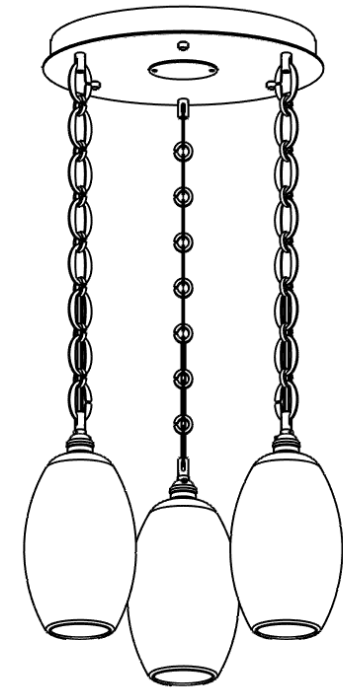

Example: CNB0035-03  
Ellisse 3PC Chain Multi-Port

**WARNING: FAILURE TO INSTALL THIS  
FIXTURE PROPERLY MAY RESULT IN  
SERIOUS PERSONAL INJURY OR DEATH  
AND PROPERTY DAMAGE.**

It is recommended that this product be installed  
by a licensed electrician who is familiar with  
proper LED installation and electrical loads.


41-001-00325  
Rev 2

## Included Components

- A. Hardware Packet S & Z
- B. Canopy
  - B1. Chain Grips
  - B2. Cylinder Knobs
  - B3. Access Plate
- C. Pendants
  - C1. Light Body
  - C2. Chain Grip
  - C3. Blown Glass
- D. Chain (unassembled)
  - D1. Ring Chain Links
  - D2. Flat Chain Links
  - D3. Open Flat Chain Links

## Required Tools

1. Philips screw driver (not provided)
2. Wire cutters/strippers (not provided)
3. Measuring tape (not provided)

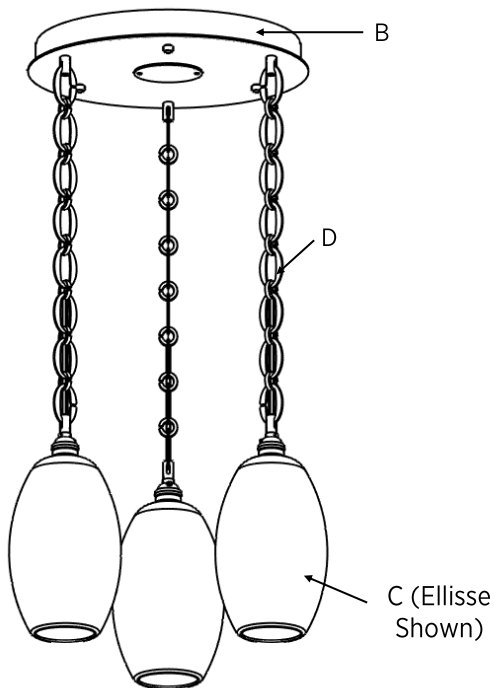

## Assembly Instructions


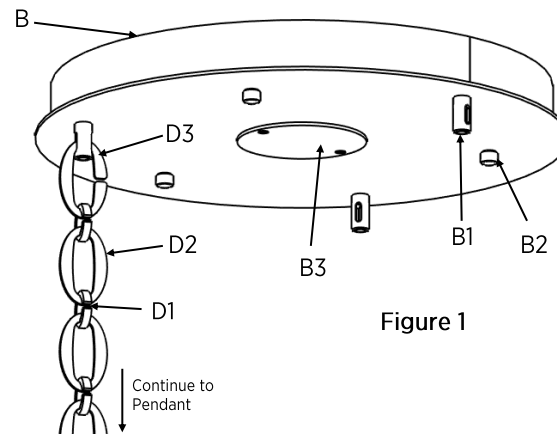


Figure 1

**Step 1:** TURN OFF POWER TO JUNCTION BOX TO BE USED FOR INSTALLATION.

**Step 2:** Unscrew cylinder knobs (B2) to detach canopy faceplate from canopy backplate. (**Note:** Canopy faceplate and backplate are tied together via cables to aid in installation)

**Step 3:** Mount canopy backplate by following provided Hardware Packet S & Z Instructions. Once mounted, leave faceplate hanging from cables as shown below.



**Step 3:** Gently bend open the provided Open Chain Links (D3) and slide inside each of the provided Chain Grips (B1) attached to the canopy. (**Note:** don't bend the open links straight yet).

**Step 4:** Starting from the Open Chain Link (D3) attached to canopy (B) Assemble the chain by interlocking alternating Flat Chain Links (D2) and Ring Chain Links (D1) (See Figure 1 for example) until desired overall height for each of the pendants (C) is achieved.

**Step 5:** Attach Pendant Light Body (C1) to the pendant chain using the pre-attached chain link (D3). (see Figure 2)

**Step 6:** Thread the pendant wires through the chain, weaving it back and forth through the Flat Chain Link openings up the pendant chain. (**Note:** It is essential that the ground wire be weaved through the chain links to provide proper grounding to the chain).

**Step 7:** Thread the pendant wires through the hole in the top of the chain grip (B1). If it is difficult to fit the wires past the Open Chain Link, remove it and replace it after threading the wires through the Chain Grip. Once wire is ran through the chain grip (B1) bend the Open Flat Chain Links (D3) straight.

**Step 8:** Make 120 VAC connections to the J-Box. Connect the dedicated ground wire of each of the pendants to ground, the RIBBED wire to NEUTRAL, and the SMOOTH wire to LIVE.

**Step 9:** Replace canopy faceplate and secure with cylinder knobs.

**Step 10:** Install Glass to the pendant body according to the instructions below.

**Prior to installing glass ensure canopy is installed according to Step 9**


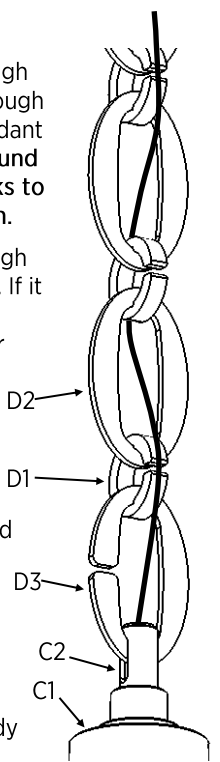


Figure 2

### If Optic Blown Glass Pendant:

Unscrew the pre-installed knurled ring. Leave the top ring installed, then slide the blown glass shade onto the socket and secure with bottom knurled ring. **HAND TIGHTEN ONLY. DO NOT OVERTIGHTEN.** Install light bulb according to re-lamping label on fixture.



### If Nebula Pendant:

Screw light bulb into socket according to re-lamping label on fixture. Un-Screw Glass Retention nut. Raise the Top Glass Retention Cap up the stem. Slide Glass Shade over light bulb, tilt to the side of the glass allowing the Bottom Glass Retention to slip inside the Glass Shade, slide the rest of the Bottom Glass Retention the rest of the way into the Glass Shade. Allow the Glass to sit on the top of the lips of the Bottom Glass Retention. and Secure Retention Nut. (**NOTE:** Tighten till Snug. **DO NOT** Overtighten!)

