

## About Hammerton Studio

---

### HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

### EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

### THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

### A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.  
217 Wright Brothers Drive  
Salt Lake City, UT 84116

801-973-8095 EXT: 4  
[www.hammerton.com](http://www.hammerton.com)

## Warranty


---

Please visit:  
<https://studio.hammerton.com/lifetime-limited-warranty/>  
to view the Hammerton Studio Warranty Policy

# HAMMERTONSTUDIO™

## Assembly Instructions

SNB00XX-09, SNB00XX-12 (chain options)

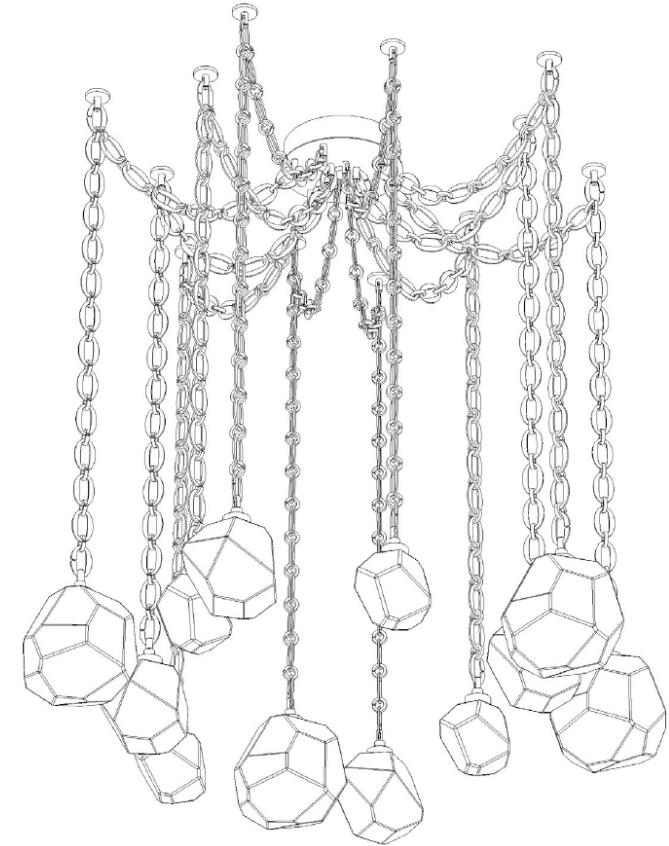

Example: SNB0039-12  
Gem 12pc Chain Swag Multi-Pendant

**WARNING: FAILURE TO INSTALL THIS  
FIXTURE PROPERLY MAY RESULT IN  
SERIOUS PERSONAL INJURY OR DEATH  
AND PROPERTY DAMAGE.**

It is recommended that this product be installed  
by a licensed electrician who is familiar with  
proper LED installation and electrical loads.

41-001-00303  
Rev 2

## Included Components

- A. Hardware Packet, with Instructions
- B. Canopy
  - B1. Canopy Faceplate
  - B2. Chain Grips
  - B3. Flat Knob
- C. Pendants
  - C1. Light Body
  - C2. Chain Grip
  - C3. Blown Glass
- D. Chain swag hooks
  - D1. E-Z Toggle Bolts
  - D2. Swag Mini-Canopies
  - D3. Threaded Washer
  - D4. Flathead Toggle Screw
  - D5. Chain Grip
- E. Chain (unassembled)
  - E1. Ring Chain Links
  - E2. Flat Chain Links
  - E3. Open Flat Chain Links

## Required Tools

1. Allen Key (provided for ledgestone configuration)
2. Philips screw driver (not provided)
3. Wire cutters/strippers (not provided)
4. Measuring tape (not provided)

## Assembly Instructions

**Step 1:** Remove Canopy Faceplate (B1) by unscrewing the Flat Knob (B3) in the Center of the Canopy and sliding Faceplate off of IP. **Note:** Faceplate is retained to canopy with cables.

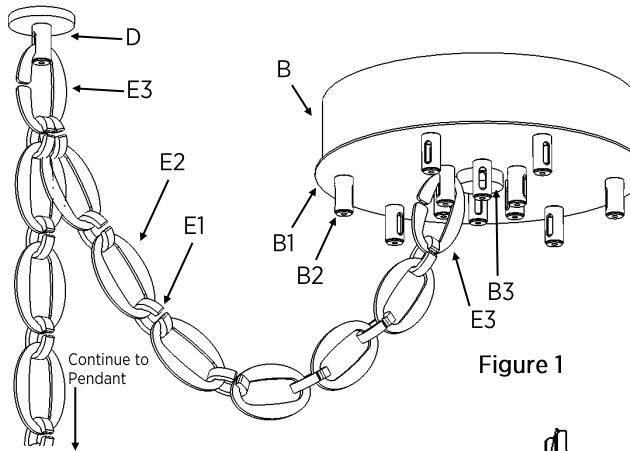


Figure 1

**Step 2:** Mount the canopy (B) to the ceiling using the provided Mounting Instructions (A). Replace faceplate by reinstalling the Flat Knob (B3)

**Step 3:** Using the E-Z Toggle bolts (D1) (see E-Z Toggle Instructions on the next page) included in the Hardware pack (A), install E-Z Toggle bolts (D1) radially around the Canopy (B) using a measuring tape to achieve the desired distance. **Note:** Toggle bolt location determines pendant location.

**Step 4:** Use the provided E-Z Toggle Screws (D4) to attach the Swag Mini-Canopies (D2) and Threaded Washers (D3) to the Toggle Bolts (D1). Once tightened, gently bend open one of the provided Open Chain Links (E3) and slide inside of the provided Chain Grip (D5), then bend the open chain link straight. Screw the Chain Grip (D5) onto the Threaded Washer (D3).

E3 (Oval Shown)




Figure 2

**Step 5:** Starting from the Open Chain Link (E3) attached to the mini canopy (D2) Assemble the chain by interlocking alternating Flat Chain Links (E2) and Ring Chain Links (E1) (See Figure 1 for example) until desired overall height for pendant is achieved. Then, starting from the Open Chain Link (E3) attached to the mini canopy (D2) once more, assemble the chain towards the main canopy until the distance between the main canopy and the mini canopy is covered.

**Step 6:** Let both the pendant chain, and the chain run to the main canopy hang only from the mini canopies, so that they are both pointing directly towards the ground.


**Step 7:** Attach Pendant Light Body (C1) to the pendant chain using the pre-attached chain link (E3).

**Step 8:** Thread the pendant wires through the chain, weaving it back and forth through the Flat Chain Link openings up the pendant chain and then down the chain run for the main canopy.



**Step 9:** Once all pendants are installed, remove the faceplate of the canopy and let it hang by the installed cables. Attach the pendants (one at a time) to the faceplate by first threading the pendant wire through the hole in the top of the chain grip (B2), then using the provided Flat Open Chain Links (E3) to attach the chain to the canopy by gently bending them open then sliding them through the slot in the chain grips (B2). Bend them straight once installed.

**NOTE:** Pendant wires are marked red and black on ends of wires, do not cut wires until you are ready to install them to terminal block. (in the event that the identifying colors are cut off the wire, the wire that is subtly rough on one edge corresponds to black and the smooth wire corresponds to red)

**Step 10:** One at a time, peel back the red wire of a pendant (pendant wire splits into 2) clip and strip to length, and install it to an LED terminal that is available (shown below). Then clip and strip the black wire and install it to that same LED terminal and move on to the next pendant. Any pendant can go to any available terminal.

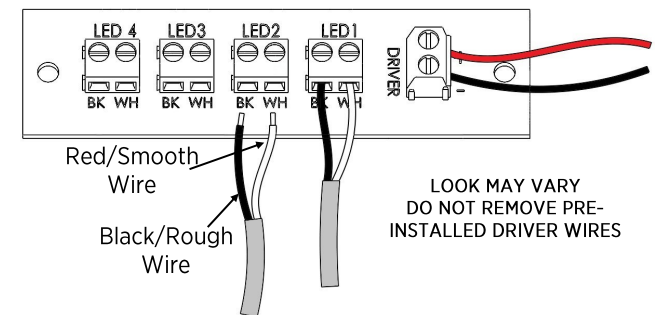

**Step 11:** Continue on following page.

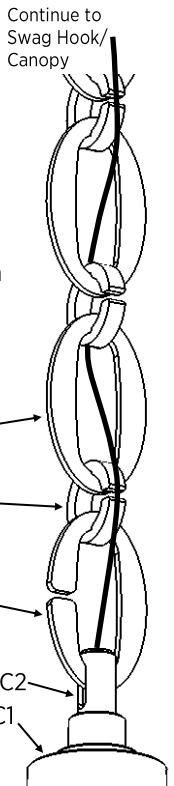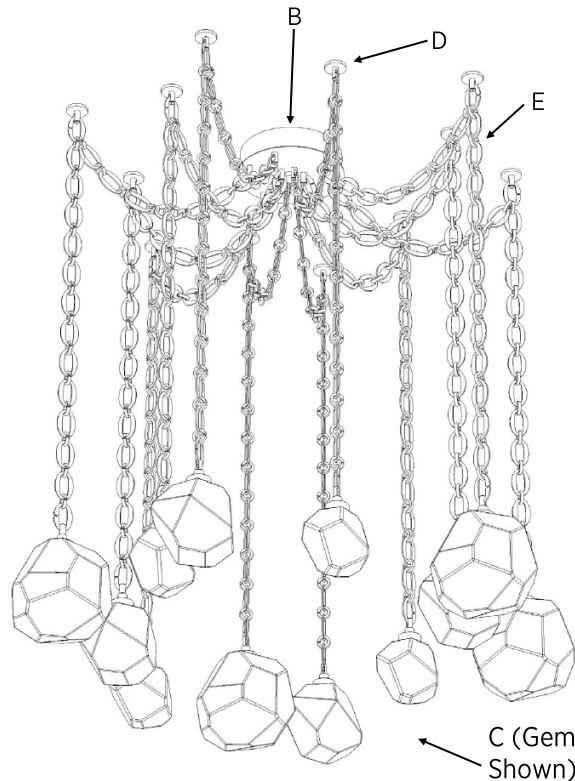

**Step 12:** Connect the 3 drivers to source power using provided wire nuts **Black to Live and White to Neutral**. Attach ground using provided wire nuts.

**WARNING**


**DO NOT DIRECTLY CONNECT LEDs TO AC POWER.** LEDs will be damaged if exposed to high voltages. The LED's must be wired in series to work properly.

**Step 13:** Replace canopy faceplate by reinstalling the Fla Knob (B3).


**Step 14:** Install glass by following the fixture specific glass instructions shown to the right.

Prior to installing glass ensure all Chain Links are properly secured through each swag hook so the glass is being supported by the swag hook and not the canopy. Solely supporting by the canopy may overload the J-Box mount resulting in damage.

**Gem, Rock Crystal, or Aalto Pendant:**  
Use #4-40 flat head screws provided to attach glass to pendant housing.




**Ledgestone Pendant:**  
Use #8-32 nylon tip set screws to retain blown glass.




**If Blossom Pendant:**  
Screw glass element into threaded pendant housing.

**If Nebula Pendant:** Screw inner glass into socket. Un-screw Glass Retention nut. Raise the Top Glass Retention Cap up the stem. Slide Glass Shade over inner glass, tilt to the side of the glass allowing the Bottom Glass Retention to slip inside the Glass Shade, slide the rest of the Bottom Glass Retention the rest of the way into the Glass Shade, Allow the Glass to sit on the top of the lips of the Bottom Glass Retention. and Secure Retention Nut. **(NOTE: Tighten till Snug. DO NOT Overtighten!)**

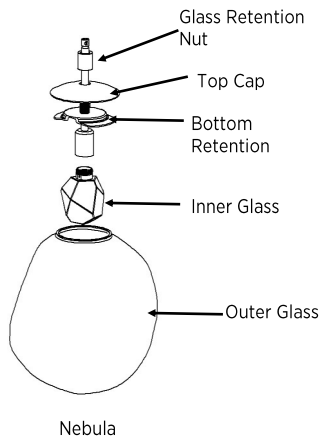


**Parallel Glass Pendant:**  
Install glass panels by unscrewing the cylinder knobs until glass can be slid into housing.  
Note that the cylinder knobs do not have to be fully removed from the fixture to install glass panels.  
Tighten the cylinder knobs, ensuring that the all thread passes through the glass panels.




Parallel

**If Raindrop Glass Pendant:**  
Place frosted diffuser in glass mount, Then screw the glass assembly onto the threaded LED mount inside of top cap.

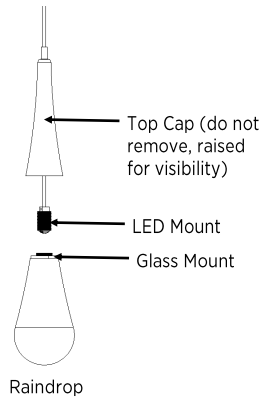

Raindrop

**If Mesa, Gaia, or Vessel:** Screw glass element into threaded cup.




Mesa Glass

Gaia Glass


Vessel Glass

**If Pebble:** Glass comes pre-attached to fixture.




Pebble


**E-Z Toggle™ Instructions**



Turn E-Z Toggle into drywall until seated flush. Arrows on head indicate direction toggle clamp will open. End with arrows up and down.



Place fixture over E-Z Toggle. Push screw into E-Z Toggle to engage clamp



Turn screw until it stops. Toggle clamp tightens against drywall as screw is turned.