


Approved By:

Product #: IDA2182


****NOTE****
 DRIVER TO BE INSTALLED IN J-BOX.
 MINIMUM SIZE OF J-BOX REQUIRED IS
 4" L x 4" W x 1.5" H

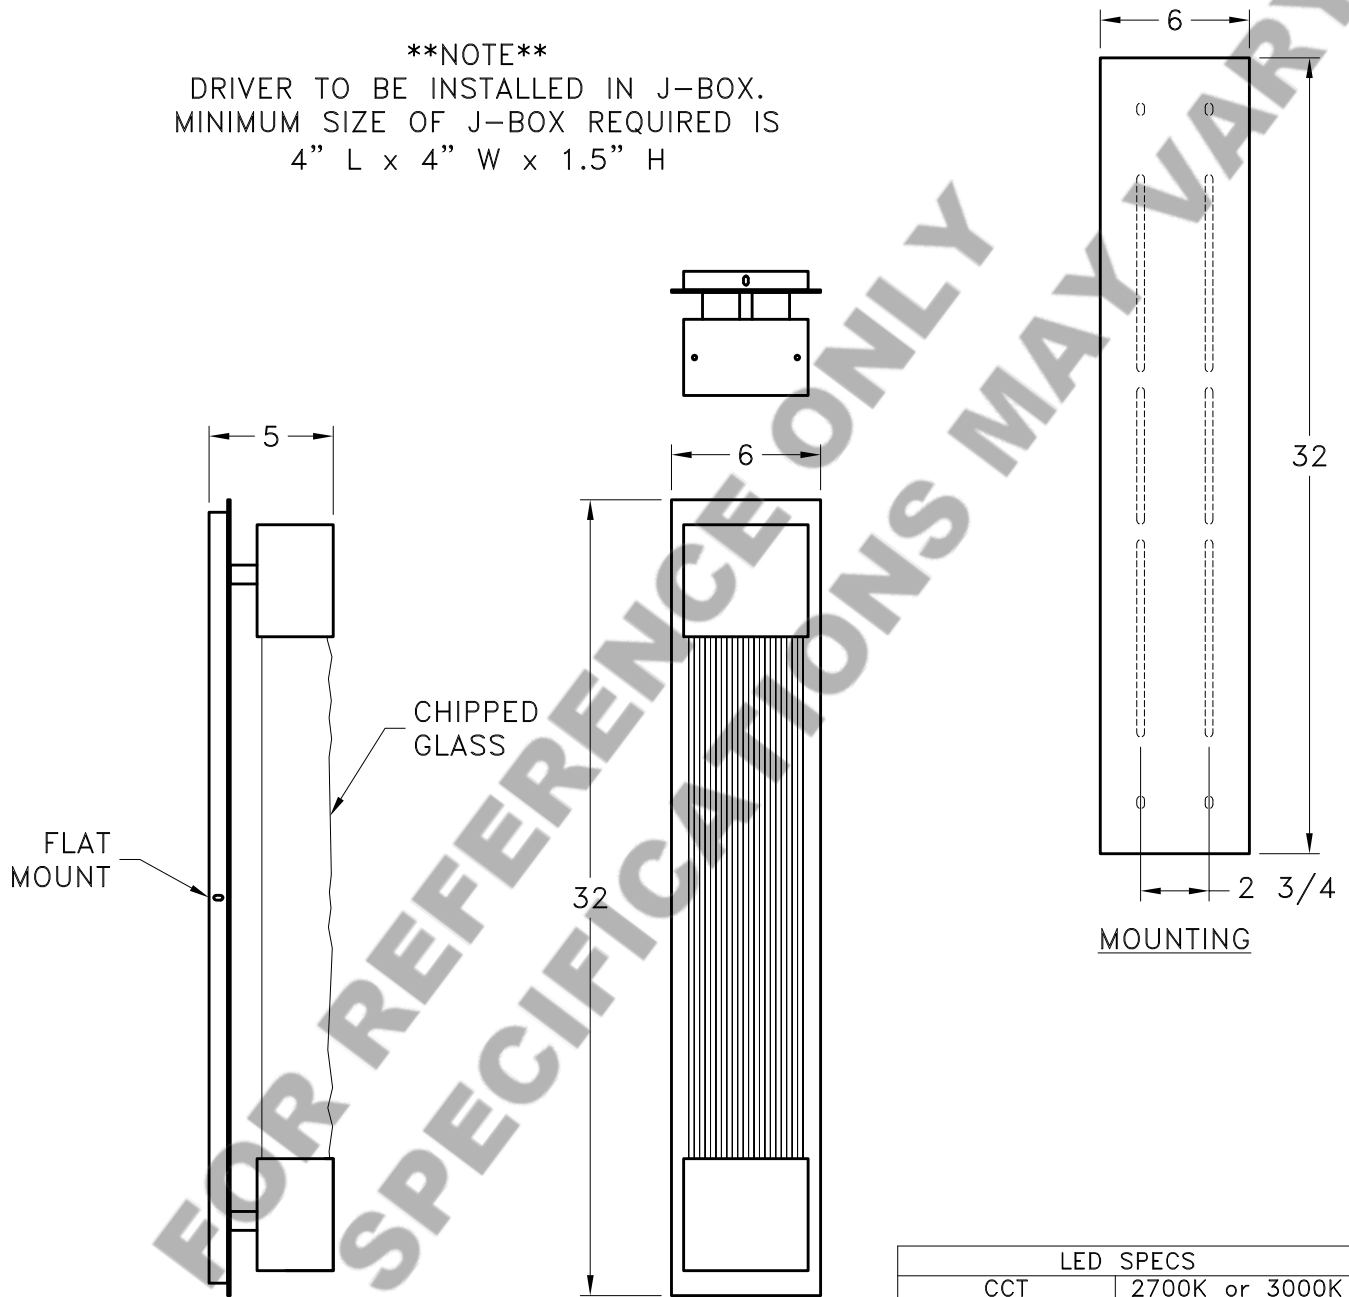

| LED SPECS | |
|---------------|-------------------------------|
| CCT | 2700K or 3000K |
| ELEC. QTY | 4 |
| TOTAL WATTAGE | 11 |
| SOURCE LIGHT | 720 lm |
| DIMMABLE | FORWARD/REVERSE PHASE & 0-10V |
| CRI | 90+ |
| POWER FACTOR | >0.9 |

| | |
|---------------------------------|---------------------------------|
| Mounting Style: FLAT | Electrical Type: INTEGRATED LED |
| Approximate lbs.: 60 | Bulb Qty: N/A Wattage: N/A |
| Finish: SEE WEBSITE FOR OPTIONS | Voltage: 120 |
| Top Diffuser: CLOSED STEEL | Socket Type: N/A |
| Bottom Diffuser: CLOSED STEEL | UL Location: DRY |

Mounting Detail

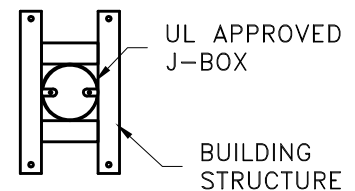

CAUTION
HARDWARE PACKET "C"
MOUNTS DIRECTLY TO
BUILDING STRUCTURE.

All fixtures created by Hammerton are handcrafted by artisans—dimensions may vary.

©Copyright 2016. All rights in design, detail or invention of this drawing are reserved as the property of Hammerton. Any imitation or adaptation without written consent is strictly prohibited.

Hammerton Inc. · 217 Wright Brothers Dr. · Salt Lake City, UT 84116 · (801) 973-8095