

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095
www.hammerton.com


Warranty

Please visit:
<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions

9pc and 12pc Cluster
CHB00XX-OL, CHB00XX-OM

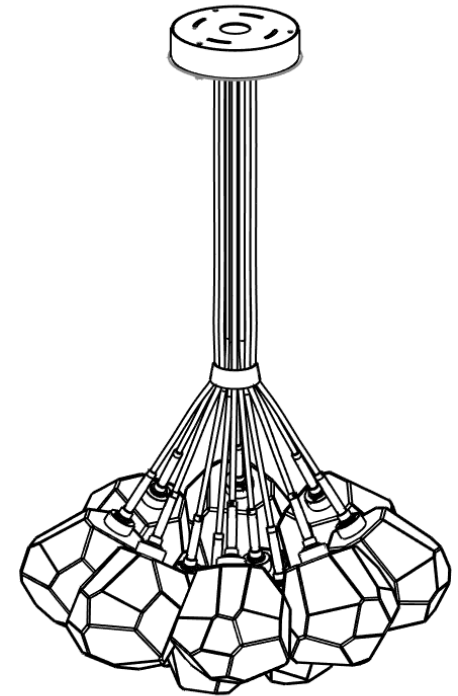

(CHB0039-OM shown)

WARNING: Failure to use the LED driver to power your pendant will permanently damage your

WARNING: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.


41-001-00349
Rev 2

Included Components

- A. Hardware Packet (T or S/Z) with Instructions
- B. Blown Glass (QTY: 9 or 12)
- C. Canopy
- D. Cloth Braided Cords
- E. Cord Grips (attached to canopy)
- F. Cylinder Knobs (QTY: 3)
- G. Small Inner Gathering Ring (QTY: 1)
- H. Large Outer Gathering Ring (QTY: 1)


Required Tools

- 1. Philips screwdriver (not provided)
- 2. Flat head screwdriver (not provided)
- 3. Wire cutters/strippers (not provided)
- 4. Measuring tape (not provided)

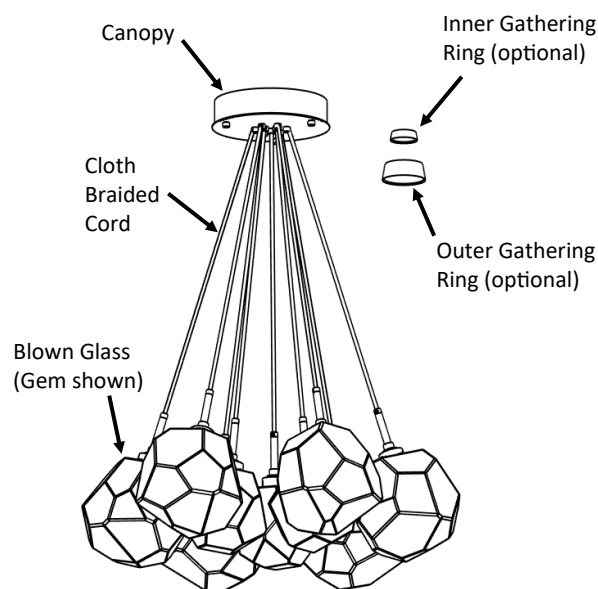

Assembly Instructions


Step 1: Remove canopy Faceplate by unscrewing the Cylinder Knobs on the Canopy.

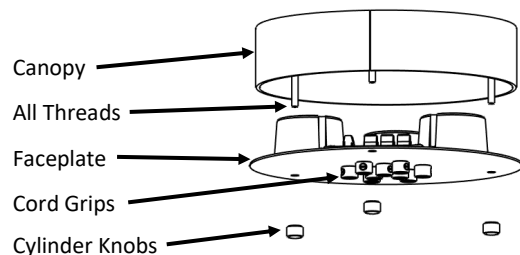


Step 2: Mount the canopy to the ceiling using the provided **Mounting Instructions T or S/Z**.

OPTIONAL Gathering Rings Installation


Step 3: Run the Inner Gathering Ring all the way down 3 cords (for 9 pc fixture), or 4 cords (12 pc fixture).




Step 4: Run the Outer Gathering Ring all the way down 9 (for 9 pc fixture) or 12 (for 12 pc fixture) cords.

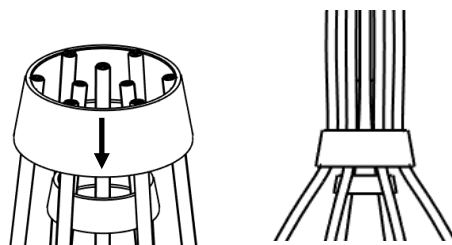

Ensure that you **do not** thread the outer 6 or 8 cords through the small gathering ring.



TOP VIEW 9 PC




TOP VIEW 12 PC

INNER GATHERING RING MUST BE INSTALLED A MINIMUM OF 18 INCHES FROM THE CANOPY TO FUNCTION AS INTENDED.

Step 5: Loosen Cord Grip screws using a flathead screwdriver.

Step 6: Feed the middle 3 (9pc) or 4 (12pc) cords through the center Cord Grips until the desired amount of cord is left between the Faceplate and light body.

Step 7: Repeat Step 6 for the remaining outer 6 or 8 cords.



If using Gathering Rings, ensure that the 3 (9pc) or 4 (12pc) center cords are the ones with the Inner Gathering Ring installed.

Step 8: Straighten and untangle all of the pendants.

Step 9: Use a measuring tape to ensure that all of your pendants are hanging the desired distance from the canopy.

Step 10: Tighten the cord grips on the faceplate using a flat-head screwdriver to secure the cords in place.

DO NOT OVER TIGHTEN. THIS MAY DAMAGE THE FIXTURE.

Step 11: Cut cords to length and re-strip the ends to prepare for wire connections.

TAKE INTO ACCOUNT THAT A MINIMUM OF 6" OF CORD WILL BE REQUIRED FOR CONNECTING THE WIRING TO THE TERMINAL BLOCKS.


Step 12: Make wire connections to the driver using the installed terminal blocks. Connect any pendant to any available terminal housing.

DO NOT REMOVE ANY PREINSTALLED WIRES

CONTINUED →

WARNING

DO NOT DIRECTLY CONNECT LEDs TO AC POWER. LEDs will be damaged if exposed to high voltages. The LED's must be wired in series to work properly.

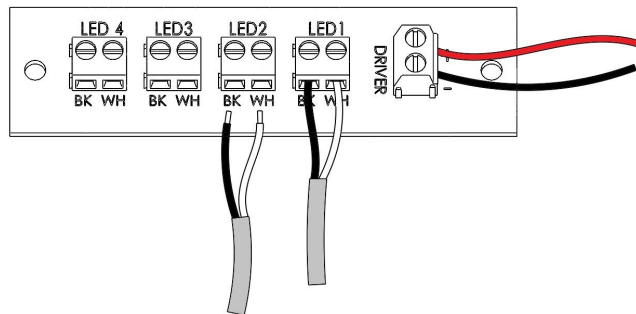

LOOK MAY VARY

WHITE wire to **WH**

BLACK wire to **BK**

Step 13: Make wire connections from source power to LED drivers. **WHITE** to **WHITE** and **BLACK** to **BLACK**.

Step 14: Install Faceplate onto the Canopy by screwing Cylinder Knobs onto the All Threads.

Step 15: Install glass to LED housings, starting with the inner-most 3 or 4 pieces, working your way outwards. Ensure the fixture remains balanced throughout the process.

TWO INDIVIDUALS ARE HIGHLY RECOMMENDED FOR GLASS INSTALLATION.

**KEEP ALL PADDING ON GLASS UNTIL IT IS INSTALLED
IN ITS FINAL POSITION.**

