


Included Components

- Hardware Packet Y, with Instructions
- Glass Gems (QTY:6)
- Canopy
- Braided Fabric Cord (QTY:6)
- Cord grip (QTY:6 – Attached to canopy)
- Cylinder Knobs (QTY:2)
- Driver

Required Tools

- Allen Key (provided)
- Philips screw driver (not provided)
- Wire cutters/strippers (not provided)
- Measuring tape (not provided)

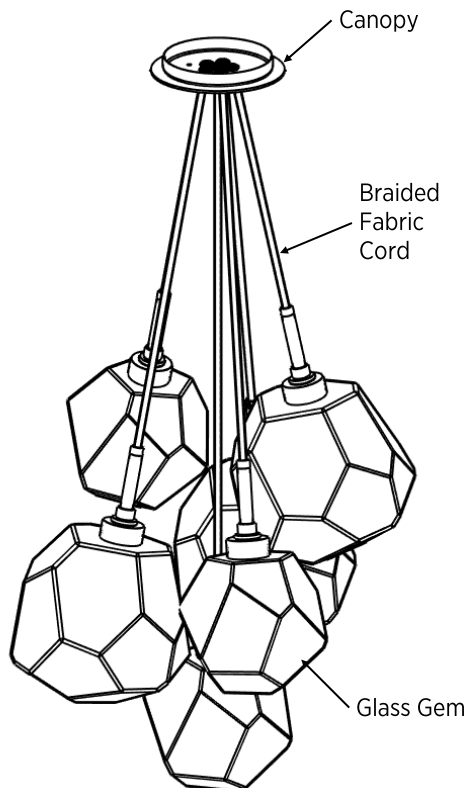

Assembly Instructions

Step 1: Feed the braided fabric cord into the canopy until the desired amount of cord is left between the canopy and light body. Take into account that a minimum of 6" of cord will be required for connecting the wiring to the driver.

Step 2: Use a measuring tape to be sure that all of your pendants are hanging the desired distance from the canopy. (We recommend 2 inches of spacing in height between each piece of glass.) Tighten the cord grip on the face of the canopy using a flat blade screw driver. **DO NOT OVER TIGHTEN. THIS MAY DAMAGE THE FIXTURE.**

Step 3: Insert Driver into Junction Box, and make Electrical Connection to source power. **Black to Black and White to White.**

Step 4: Mount universal to J-Box using provided **Mounting Packet Y Instructions.**

Step 5: Make electrical connections from the pendants to the Driver. Pendants will be wired in two parallel circuits. Each circuit will consist of three pendants in series. Make the following connections;

WARNING

THE BLACK AND RED LEADS FROM THE DRIVER ARE FOR DC CURRENT ONLY. IF THESE LEADS OR THE LED PENDANTS ARE CONNECTED TO AC POWER THE FIXTURE WILL BE DAMAGED.

CAUTION

The LED's must be wired in series to work properly.

Step 6: Make wire connections from the Pendant assemblies to the LED Driver according to the diagram shown to the right. The circuit will consist of 2 parallel branch circuits with each branch containing 3 pendants. **Note:** Pendant order does not matter. Pick any Pendant to be Pendant 1, 2, 3 Etc.


- Connect the **BLACK** wire of both Pendant 1 and 4 to the **BLACK** wire from the driver.
- Connect the **WHITE** wire of Pendant 1 to the **BLACK** wire of Pendant 2
- Connect the **WHITE** wire of Pendant 2 to the **BLACK** wire of Pendant 3
- Connect the **WHITE** wire of Pendant 4 to the **BLACK** wire of Pendant 5
- Connect the **WHITE** wire of Pendant 5 to the **BLACK** wire of Pendant 6
- Connect the **WHITE** wire of both Pendant 3 and 6 to the **RED** wire from the driver.

Step 7: Mount canopy to ceiling using provided **Mounting Instructions.**

Step 8: Attach glass to LED housings.


NOTE: Install glass one at a time, ensuring fixture remains balanced. **TWO INDIVIDUALS ARE HIGHLY RECOMMENDED FOR GLASS INSTALLATION.**

Gem, Rock Crystal, Aalto, Fiori, Blossom, Gaia, Mesa, Vessel, Cabochon
1- Screw glass either into or onto threaded pendant housing.

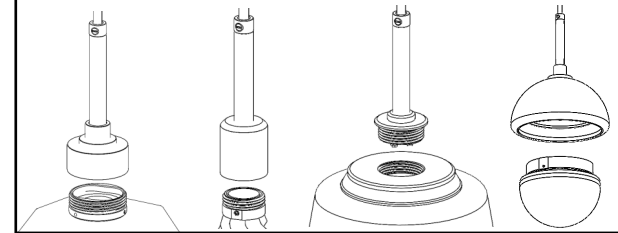


Luna

- Screw inner glass into socket.
- Slide outer glass over inner glass.
- Attach outer glass to top cap using provided screws.



For all Glass Retention
Tighten till snug
DO NOT overtighten

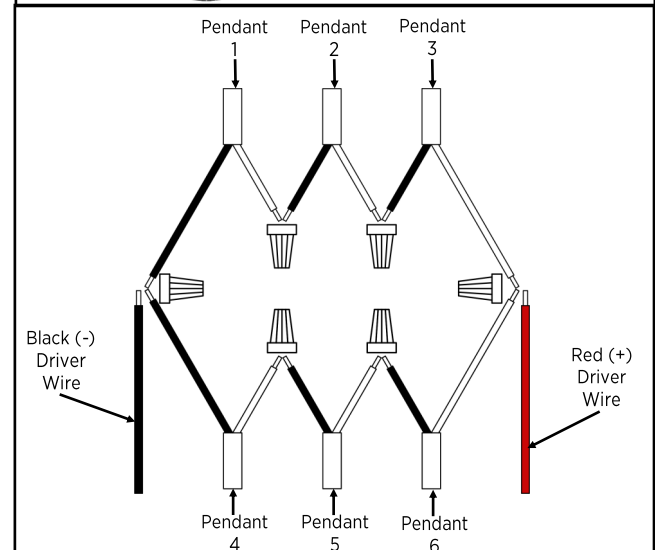

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116


801-973-8095
www.hammerton.com

Warranty

Please visit <https://studio.hammerton.com/lifetime-limited-warranty/> to view the Hammerton Studio Warranty Policy.

HAMMERTONSTUDIO™

Assembly Instructions 6pc Cluster

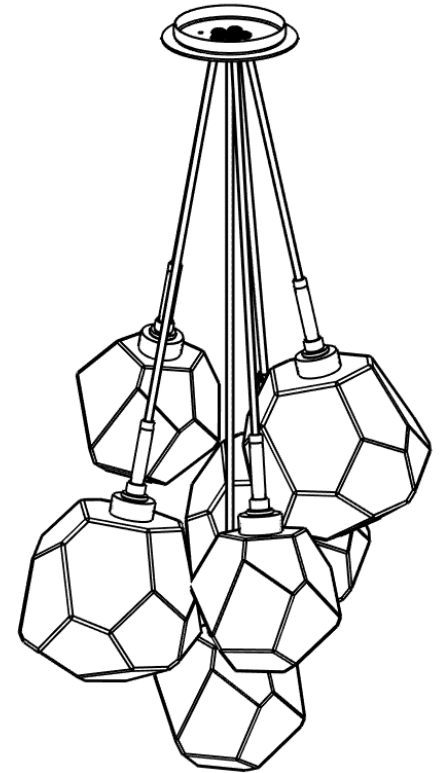

**WARNING: FAILURE TO INSTALL THIS
FIXTURE PROPERLY MAY RESULT IN
SERIOUS PERSONAL INJURY OR DEATH
AND PROPERTY DAMAGE.**

It is recommended that this product be installed
by a licensed electrician.

41-001-00006
Rev 6