

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116

801-973-8095 EXT: 4
www.hammerton.com

Warranty


Please visit:
<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions

Tessera Indoor/Outdoor Sconce

Image below is a representation of applicable product collection

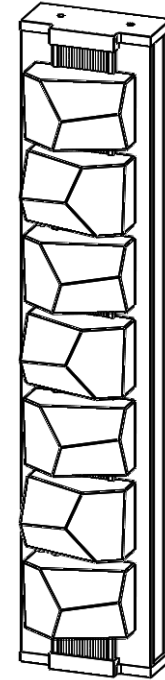

IDB0100/ODB0100

WARNING: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.

41-001-00294
Rev 3

Included Components

- A. Hardware Packet, with Instructions
- B. Sconce Light Body
- C. Inner Cover Plate
- D. Top Cover Plate
- E. Cast Glass
- F. Glass Spacers

Required Tools

- 1. Phillips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)
- 3. Measuring tape (not provided)
- 4. Sealing compound for weatherproofing (not provided, outdoor only)

Assembly Instructions

Step 1: Gently remove cover plate (C) from light body (B) by hand. The cover plate (C) is attached with magnets, so no tools are required.


Step 2: Mount the light body, following the instructions included in the hardware packet. There are several mounting locations along the light body, so that the height of the fixture can be varied. Use the mounting location that places the fixture at the desired height. For 36" fixtures, use the included hardware to structurally mount the light fixture after mounting to the J-Box using any of the existing holes in the backplate.

Step 3: If installing in an outdoor location, **FULLY SEAL** the perimeter of the sconce with silicone sealant.

Step 4: Make electrical connections from the building to the light body using the wire nuts provided, connecting the ground wire to the ground, the white wire to neutral, and the black wire to hot.

Step 5: Replace the cover plate removed previously, lining up the magnets so the cover plate stays in place securely.

Step 6: Use a screwdriver to remove the top cover plate (D) on the light body (B). Install Glass Spacers (F) and Cast Glass (E) by sliding them into the interlocking grooves in the light body. Install the larger spacers on the top and bottom of the fixture, and use the smaller spacers between each glass piece. Alternate direction of cast glass pieces as desired. Replace the top cover plate (D) using the two screws removed previously. If installing a Tetro option sconce, be sure to install the smaller pieces of glass first, then alternate with larger pieces.

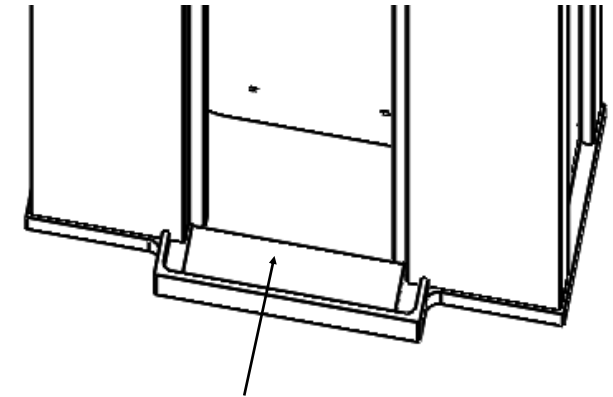

Step 7: If top cover plate (D) does not fit over Glass Spacers (F), peel out the rubber insert from the bottom of the light body (B).

