


Included Components

- A. Hardware Packet T (not shown)
- B. Handblown Glass (QTY:6)
- C. Canopy and Light Body
- D. Stone or Metal Shade
- E. Loctite (Stone Configuration Only)


Required Tools

- 1. Philips screw driver (not included)
- 2. Wire cutters/strippers (not provided)
- 3. Measuring tape (not provided)
- 4. 1/16 Allen Key (provided)

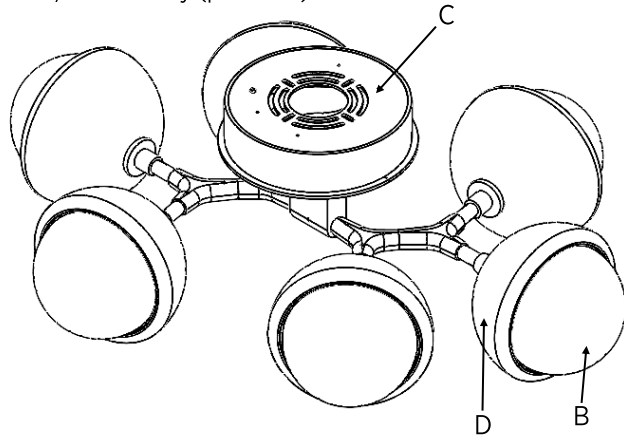

Assembly Instructions


Step 1: Remove cover plates from canopy by removing cylinder knobs and mount the fixture to J-Box following the provided **Mounting Instructions**.

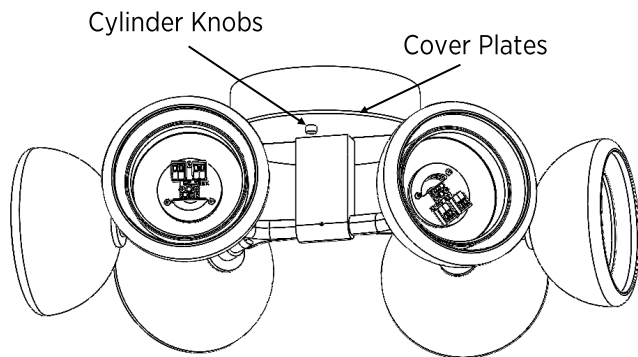

Step 2: Connect driver to source power, **Black to Live and White to Neutral**


Step 3: Re-Install Cover Plates to the canopy using the cylinder knobs.

Step 4: Use provided Allen key to secure set screws on each branch knuckle (3 per knuckle) that may have loosened in shipping.

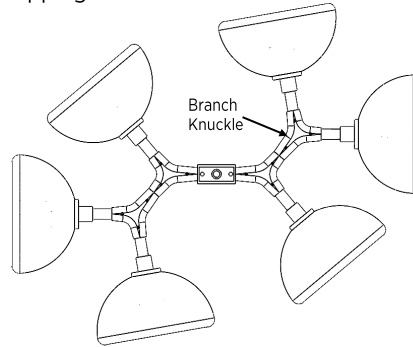


Step 5: Skip steps 6-9 for Metal Shade configuration.


Step 6: Remove LED heatsinks from retention cups by unscrewing the pan-head Phillips screws. (set screws aside for later)

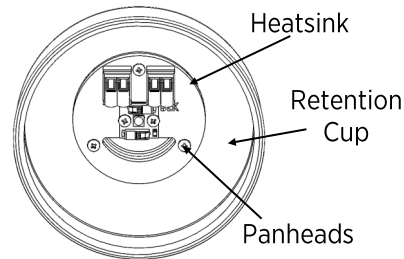

Step 7: Apply Loctite to the shown IPS threads. Run Stone Shade over wire and IPS. Run retention cup over wire and thread onto IPS until tightened firmly.

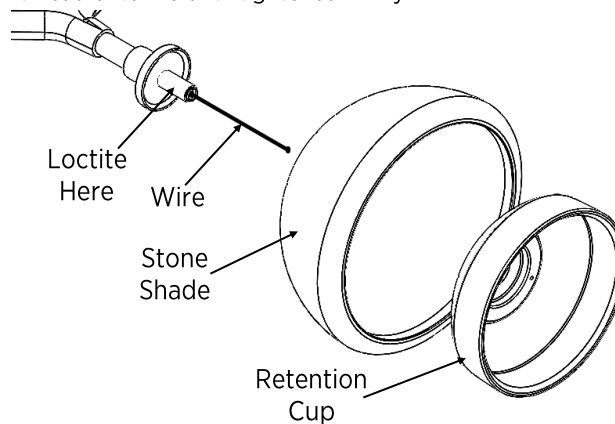


Step 8: Run wire through the half circle on the LED Heatsink and secure heatsink to retention cup using the pan-head Phillips screws you set aside earlier.

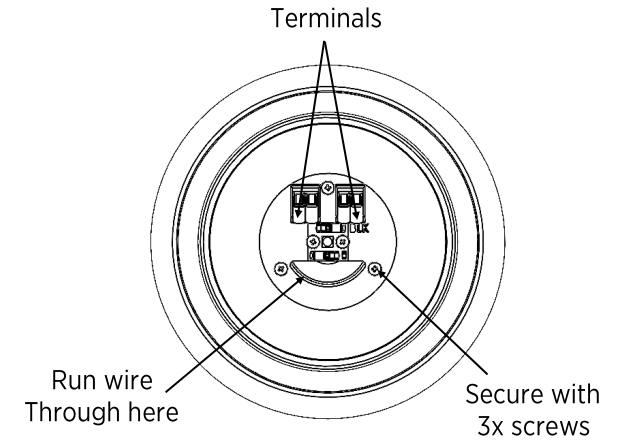

Step 9: Flip up the leftmost and rightmost orange terminals shown above. Strip wires and run the **black wire** to the side labelled **BLK** and the **red wire** to the unlabeled side, and flip terminals closed.

Step 10: Install glass by screwing the threaded collar on the glass into the threaded retention cup.

NOTE: Install glass one at a time, ensuring fixture remains balanced.

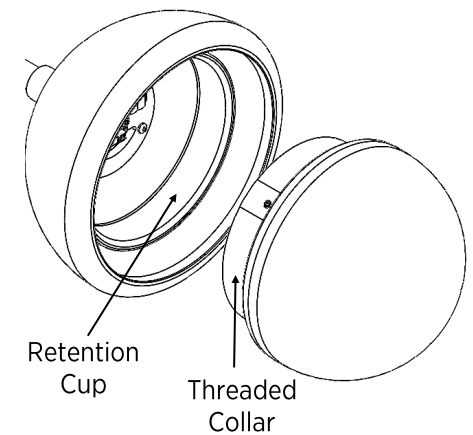

About Hammerton Studio

HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.
217 Wright Brothers Drive
Salt Lake City, UT 84116


801-973-8095 EXT: 4
www.hammerton.com

Warranty

Please visit:
<https://studio.hammerton.com/lifetime-limited-warranty/>
to view the Hammerton Studio Warranty Policy

HAMMERTONSTUDIO™

Assembly Instructions Cabochon Modern Branch Flush Mount

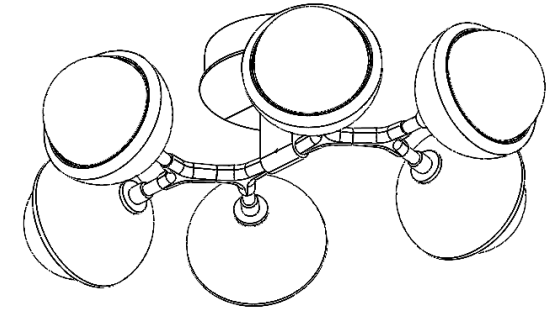

CLB0093-01

**WARNING: FAILURE TO INSTALL THIS
FIXTURE PROPERLY MAY RESULT IN
SERIOUS PERSONAL INJURY OR DEATH
AND PROPERTY DAMAGE.**

It is recommended that this product be installed
by a licensed electrician.

41-001-00304
Rev 1