

## About Hammerton Studio

---

### HAMMERTON STUDIO

When we introduced the Hammerton Studio brand in 2014, we saw an enormous opportunity to raise the bar in decorative lighting. In design, we wanted to lead rather than follow. In construction, we wanted to showcase Hammerton's renowned reverence for time-honored artisan craftsmanship and authentic materials. In performance, we wanted to provide highly reliable solutions that far exceeded industry norms for aesthetics, function, and quality. Based on the brand's dramatic growth and customer feedback, it's clear we are on the right track.

### EXTRAORDINARY DESIGN VALUE IN ARTISAN GLASS & METALWORK

Hammerton began in 1995 as a blacksmith shop, but we've come a long way since then. Today we employ a world class team of metal artisans who are disciplined in a broad range of fabrication techniques and processes. We've also added in-house capabilities in blown, cast and kiln-fused glass, and today Hammerton operates one of the largest artisan glass production facilities in the U.S. With deep design and fabrication expertise at the intersection of glass and metalwork, we're laying the foundation for a new era of lighting innovation.

### THE HAMMERTON HERITAGE

Our Hammerton Studio brand stands on the shoulders of more than a quarter century of experience pushing the boundaries of innovative custom lighting design. Each Hammerton Studio collection has been inspired by custom work our company has brought to life in collaboration with leading interior design professionals over the years. Built to your specifications, every fixture reflects the uncompromising design and attention to detail that is distinctly Hammerton.

### A REPUTATION REFLECTED BY OUR CLIENTS

Hammerton fixtures are as extraordinary as the clients who purchase them, including Forbes 400 members, Fortune 500 leaders, award-winning entertainers, fashion and interior designers, sports legends, and leading luxury hospitality brands.

Hammerton Inc.  
217 Wright Brothers Drive  
Salt Lake City, UT 84116

801-973-8095 EXT: 4  
[www.hammerton.com](http://www.hammerton.com)

## Warranty

---


Please visit:  
<https://studio.hammerton.com/lifetime-limited-warranty/>  
to view the Hammerton Studio Warranty Policy

# HAMMERTONSTUDIO™

## Assembly Instructions

### Delphine Rings

*Image below is a representation of applicable product collection*

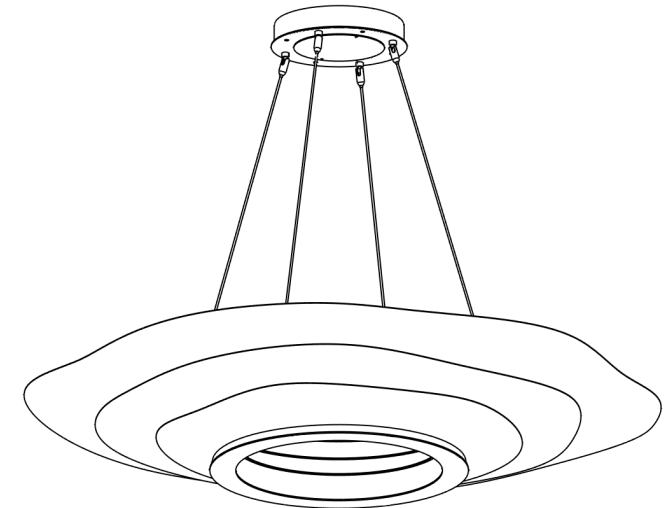

CHB0105-XX

**WARNING:** FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.

It is recommended that this product be installed by a licensed electrician.


41-001-00336  
Rev 1

## Included Components

- A. Hardware Packet R, with Instructions
- B. Canopy
- C. Ring Light Body

## Required Tools



- 1. Phillips screw driver (not provided)
- 2. Wire cutters/strippers (not provided)
- 3. Measuring tape (not provided)
- 4. Level (not provided)
- 5. Diagonal Cable Cutters

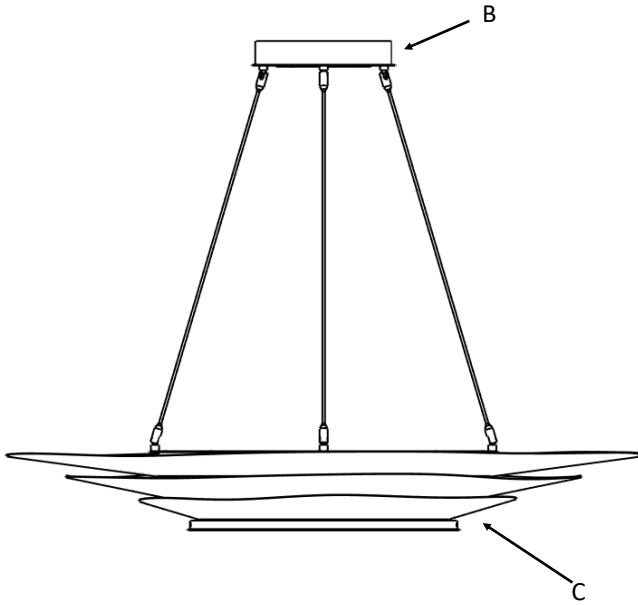

Example Fixture Shown: CHB0105-48


## Assembly Instructions

**Step 1:** Remove the faceplate from the canopy by unscrewing the four outer screws on the faceplate. Mount Canopy using provided mounting packet instructions, then replace the faceplate.

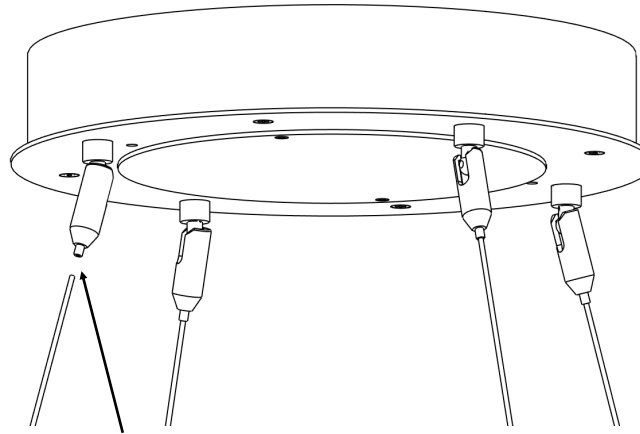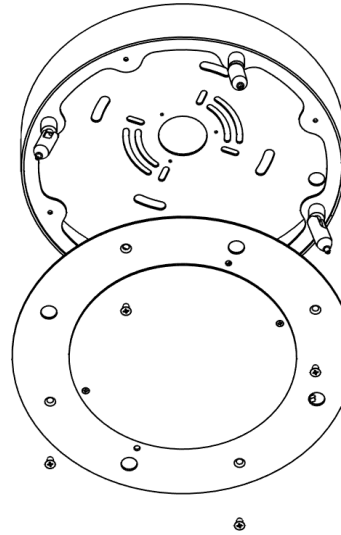


**Step 2:** Install aircraft cables in canopy cable grippers by inserting the end of the cable into the plunger on the gripper.

**Step 3:** Install the other end aircraft cables in canopy cable grippers by inserting the end of the cable into the plunger on the gripper. Check that the coax power cable on the canopy lines up with the wiring access hole on the ring light body (shown in step 4). Pull cables through the side of the gripper until desired fixture height is achieved, then trim the cables with cable cutters. Be careful to not let the cables come out of the grippers. Once cut, cables can fray easily and can be difficult to get back in the grippers.

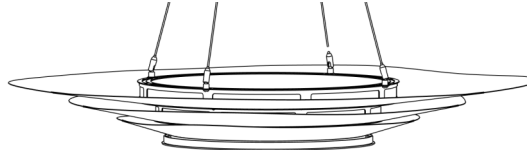

**Step 4:** Check that the red JST connector is routed through the wiring access hole next to one of the four grippers on the light body. If it has fallen through, carefully pull the connector through the access hole and plug in the end of the coax power cable to the light body JST connector, then push the connectors back down through the access hole to hide them.

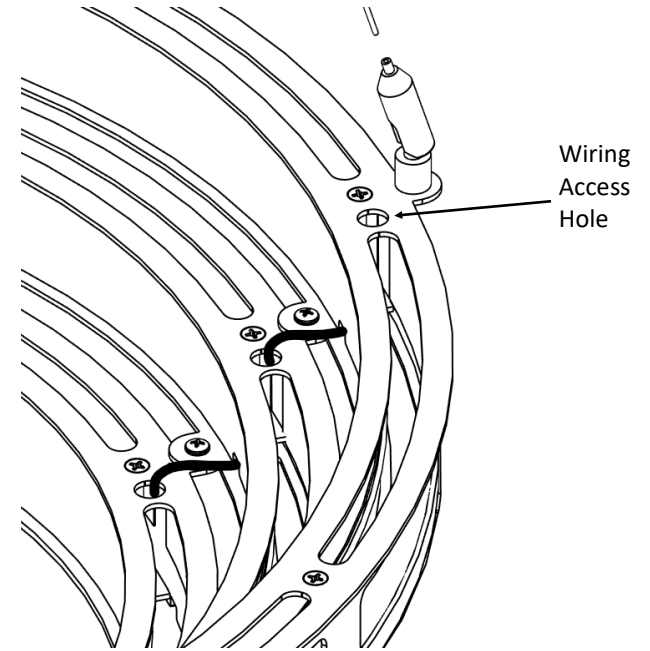

**Step 5:** Use the provided plastic clips to connect the coax power cable to the aircraft cable, spacing them uniformly along the length of the cable. Push the excess coax power cable up into the canopy. If there is too much coax power cable to fit in the canopy, remove the access plate on the canopy and unplug the coax from the connectors on the LED driver. Trim the coax power cable to a more manageable length and follow this procedure to strip it: Strip outer sheath of coax cable off and pull inner shielded conductor through a gap in the outer conductor to separate them. Twist outer conductor together. Attach outer conductor (-) to the purple wire (-) on the driver. Strip and attach inner conductor (+) to the red wire (+) on the driver. Replace access plate.

**Warning:** Source Power should be turned off. Failure to do so may result in damage to the fixture.